

ecoLogo® Pegamento en cinta Permanente ambidiestro

Cinta correctora; corrector de cinta; corrector liquido; artículos de papelería; material de papelería; material escolar; corrección de errores

Aplicación principal

- tesa Roller ecoLogo® con adhesivo permanente es la forma moderna de fijar algo a largo plazo.
- Fabricado con plástico 100% reciclado
- Adhesivo extra fuerte
- Limpio, rápido y adhesivo permanente
- Se adhiere en papel, cartón y papel fotográfico
- Restos de pegamento rojizo muestra donde se ha aplicado el adhesivo
- Cinta de soporte más resistente (PET)
- Longitud de cinta: 8.5 m
- Anchura de cinta: 8.4 mm


Datos técnicos y Propiedades

Dimensiones	14m x 8.4mm, 8.5m x 8.4mm
Color	transparente
Adhesivo	Adhesivo Acrilato
Packaging	PP / PE / Cartón reciclado
Material contenedor	PS Reciclado
Amacenaje	Aprox. 2 años después de la apertura a una temperatura de entre 5-35 °C. Almacenar en un lugar seco.

For the latest information on this product please visit <http://www.tesa.com/consumer>

tesa® products prove their impressive quality day in, day out in demanding conditions and are regularly subjected to strict controls. All technical information and data above mentioned are provided to the best of our knowledge on the basis of our practical experience. They shall be considered as average values and are not appropriate for a specification. Therefore tesa SE can make no warranties, expressed or implied, including, but not limited to any implied warranty of merchantability or fitness for a particular purpose. The user is responsible for determining whether the tesa® product is fit for a particular purpose and suitable for the user's method of application. If you are in any doubt, our technical support staff will be glad to support you.

Información adicional e imágenes

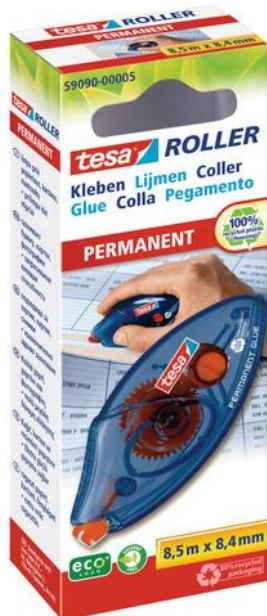

59090

For the latest information on this product please visit <http://www.tesa.com/consumer>

tesa® products prove their impressive quality day in, day out in demanding conditions and are regularly subjected to strict controls. All technical information and data above mentioned are provided to the best of our knowledge on the basis of our practical experience. They shall be considered as average values and are not appropriate for a specification. Therefore tesa SE can make no warranties, expressed or implied, including, but not limited to any implied warranty of merchantability or fitness for a particular purpose. The user is responsible for determining whether the tesa® product is fit for a particular purpose and suitable for the user's method of application. If you are in any doubt, our technical support staff will be glad to support you.