


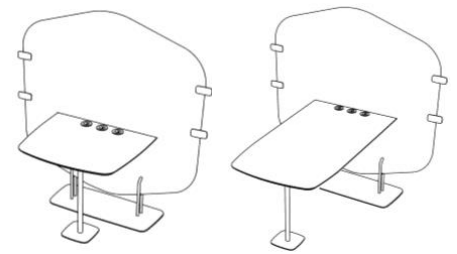
FEATURES



1 & 2 PERSON SEATS, ROCKING CHAIR

<p>STRUCTURE</p>	<p><b>Seat</b> &gt; Top formed using a 19 mm thick particle board panel covered with injection moulded polyurethane foam. Foam padding 60 mm thick, density 60 kg/m<sup>3</sup> &gt; Fire resistant foam: contact us for details</p> <hr/> <p><b>Low and high back</b> &gt; Metal structure covered with injection moulded polyurethane foam. Foam padding 40 mm to 60 mm in thickness. Density 60 kg/m<sup>3</sup> &gt; Fire resistant foam: contact us for details &gt; Backrest secured to base using bolts</p>
<p>COVERING</p>	<p>Choice of fabrics (see shade card) Piping detail outlining the seat and the backrest (except leather version, double-stitching) Topstitching in matching shades</p>
<p>LEGS</p>	<p><b>Metal base</b> &gt; Wire frame base Ø 16 mm welded to a metal structure &gt; Lacquered epoxy finish (see metal shade card) &gt; Plastic glides built into the feet</p> <p><b>Legs in wood/metal combination</b> &gt; Solid beech legs Ø 30 mm with natural varnish coating &gt; Metal frame, lacquered epoxy finish (see metal shade card) &gt; Felt floor pads nailed to underside of feet</p> <p><b>Metal base specific to Rocking chair version</b> &gt; Wire frame base Ø 16 mm, welded to a metal structure and sled base Flat metal W. 25 mm, 6 mm thick &gt; Lacquered epoxy finish (see metal shade card) &gt; Double coat of paint and softened edges to avoid marking floors Seat secured to base using screws</p>
<p>CABLE MANAGEMENT</p> 	<p><b>Seats can also be equipped with power socket feeds (except the rocking chair version)</b> &gt; 2 openings cut-out in seat: 1 PC strong current 250V (adapted to EU countries &amp; CH), 1 socket with 2 USB charger ports 5V &gt; Each module is linked by 1 shared distribution terminal, supplied in turn by a L. 1.5 M power cable( EU and CH versions) &gt; 2 decorative trim rings included: in black or white plastic</p>





## PARTITION SCREEN WITH TABLE FOR MEETING SPACE

STRUCTURE AND COVERING	<p>25 mm thick melamine partition screen with a polyester foam cladding 12 mm thick and covered in fabric upholstery with contour piping around the edges (see fabrics shade card)</p> <p>Partition screen and backrest are linked to create a booth using metal fixing clamps in a matching finish to the legs.</p> <p>The meeting table is secured to the partition screen using screws</p> <p>Self-supporting partition screen</p> <p>Power cables channelled through a cable sleeve on the lower extremity of the partition.</p>
LEGS	<p><b>Partition screen</b> Wire welded to a metal rectangular base, Dim. 750 x 300 mm, 6 mm thick, cut-out opening in the center to allow channelling of power supply cables down to raised floor</p> <p><b>Table</b> Welded tubular structure mounted on a square base, Dim. 200 x 200 mm and made from metal, 6 mm thick</p>
MEETING TABLE WORKTOP	<p><b>Choice of two worktops</b></p> <ul style="list-style-type: none"> <li>&gt; 19 mm thick melamine covered particle board worktop, with flat ABS edge banding 2 mm thick in a matching finish</li> <li>&gt; 18 mm birch plywood panel with a 22 mm thick linoleum covering on both of the principal surfaces, tapered aircraft wing design edging with varnish coating</li> </ul> <p>Worktops are pre-cut in 3 places to facilitate electrical supply connections (Electrical power connection kit to be ordered separately)</p> <p>Worktop height 680 mm. W. 700 x D. 580 mm (2 seat version) / D. 1,390 mm (4 seat version)</p>
CABLE MANAGEMENT	<p><b>For meeting table worktop pre-cut in 3 places to receive socket feeds Ø 68 mm</b></p> <ul style="list-style-type: none"> <li>&gt; 2 PC strong current 250V (adapted to EU countries &amp; CH) / 1 socket with 2 USB charger ports 5V</li> <li>&gt; The 2 power connections are linked by 1 shared distribution terminal, supplied in turn by a L. 1.5 M power cable( EU and CH versions) while the 2 USB socket is supplied by a L. 1.5 M power cable( EU and CH versions)</li> <li>&gt; 2 decorative trim rings included: in black or white plastic</li> </ul>
OPTION FOR PARTITION SCREEN	<p><b>Whiteboard</b></p> <ul style="list-style-type: none"> <li>&gt; White PMMA whiteboard 6 mm thick, W. 700 x H. 585 mm</li> <li>&gt; Fitted with a metal pen tray, sheet steel 1 mm thick, W. 190 x H. 85 mm x D. 80 mm, epoxy lacquered finish, available in multiple colours (see shade card)</li> <li>&gt; Attaches to the partition screen using metal fixing clamps, in a matching finish to pen tray</li> </ul>



## FOOTSTOOL

STRUCTURE	<p>Top formed using a 19 mm thick particle board panel. Vertical structure built around 5 mm thick cardboard</p> <p>Polyurethane foam Density 43kg/m3, seat pad 80 mm thick and wrap-around padding 10 mm thick</p> <p>Fire resistant foam compliant with standards EN 1021-1 and -2 - classified CF in accordance with GPEM D2-200</p>
COVERING	<p>Choice of fabrics (see shade card)</p> <p>Piping detail outlining the contour of the footstool</p> <p>Topstitching in matching shades</p>
LEGS	<p>Footstool mounted on ABS adjustable stabiliser feet, adjust through 10 mm. Secured using inserts</p>





### SEAT OPTIONS (EXCLUDING ROCKING CHAIR)

<p>ROTATABLE WRITING SHELF</p>	<p>Tubular metal structure Ø 20 mm fixed to a rotating axis                  2 choices of worktop, Dim. W. 500 x D. 300 mm:                  &gt; 19 mm thick melamine covered particle board worktop, with flat ABS edge banding 2 mm thick in a matching finish                  &gt; 18 mm birch plywood panel with a 22 mm thick linoleum covering on both of the principal surfaces, tapered wing design edging with varnish coating</p> <p>See shade card for available finishes                  Secured to the underside of the metal seat using screws, on either the left or right side (not compatible with the rocking chair version)                  Height from the floor to the the writing shelf: H. 650 mm</p>
<p>HEADREST FOR HIGH BACK</p>	<p>Polyester fibre density 400g/M3.                  Fabric covering (see shade card)                  Topstitching in matching shades                  Metal counter weight                  Dimensions: W. 400 x H.970 x THK 70 mm</p>
<p>CUSHIONING</p>	<p>Polyester fibre density 400g/M3.                  Fabric covering (see shade card)                  Piping detail outlining the seat cushion                  Dimensions: D. 400 x H. 250 x THK 100 mm</p>











### TABLES & SIDE TABLES

<p>WORKTOP</p>	<p>Choice of two worktops:                  &gt; 19 mm thick melamine covered particle board worktop, with flat ABS edge banding 2 mm thick in a matching finish                  &gt; 18 mm birch plywood panel with a 22 mm thick linoleum covering on both of the principal surfaces, tapered wing design edging with varnish coating</p> <p>See shade card for available finishes</p>
<p>LEGS</p>	<p>Tubular metal feet Ø 20 mm welded to a metal structure                  Plastic glides built into the foot of the leg                  Legs secured to the worktop using metal inserts</p>








# DIMENSIONS





SEATS	1 PERSON SEAT (metal or wood/metal combination legs)			
	 WITHOUT BACKREST	 LOW BACKREST	 HIGH BACKREST	 ROCKING CHAIR
OVERALL DIMENSIONS (in mm)				
Width	628	690	745	690
Depth	628	660	660	685
Height	430	785	1410	780
USEFUL DIMENSIONS (in mm)				
Seat width	628	400	400	400
Seat depth	628	490	490	490
Seat height	430	430	430	430
WEIGHT (kg)				
Max. load	130	130	130	130

	 WITHOUT BACKREST	 LOW BACKREST	 HIGH BACKREST	 MERIDIENNE
OVERALL DIMENSIONS (in mm)				
Width	1490	1555	1560	1520
Depth	628	660	660	660
Height	430	785	1410	785
USEFUL DIMENSIONS (in mm)				
Seat width	1490	1255	1255	550
Seat depth	628	490	490	480
Seat height	430	430	430	430
WEIGHT (kg)				
Max. load	260	260	260	260



MEETING SPACES	PARTITION SCREENS & MEETING SPACES			
				
	PARTITION SCREENS Compact format	PARTITION SCREENS Large format	MEETING SPACE 2 seats	MEETING SPACE 4 seats
OVERALL DIMENSIONS (in mm)				
Width	1225	1225	2130	2130
Depth	750	1555	870	1680
Height	1450	1450	1450	1450
WEIGHT (kg)				
Max. load	30	30	30	30

FOOTSTOOL	
OVERALL DIMENSIONS (in mm)	
Diameter	Ø 420
Height	450
WEIGHT (kg)	
Max. load	100

TABLES	TABLES			
				
	ROTATABLE WRITING SHELF	RECTANGULAR TABLE	SQUARE TABLE	CIRCULAR SIDE TABLE
OVERALL DIMENSIONS (in mm)				
Width	500	1000	500	Ø 350
Depth	300	500	500	Ø 350
Height	460 / 650 (height from the floor)	350		450
WEIGHT (kg)				
Max. load	3	100	100	100

