




TEGERA® CHEMFORCE 18601A

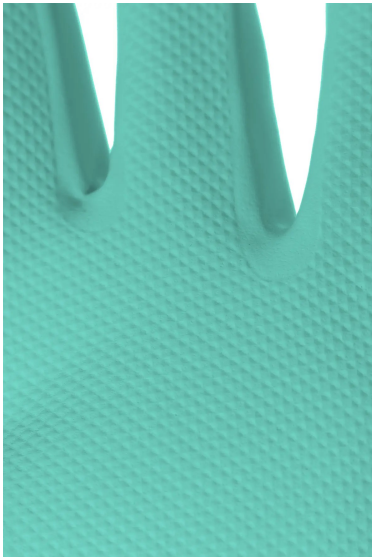

[Learn more](#)

SECURE PROTECTION AGAINST MANY CHEMICALS.

A versatile chemical-resistant glove in 0.38 mm/14,9 mils thin nitrile, suitable for everything from household to chemical industry. Excellent grip due to the raised diamond pattern. Latex-free. 12 pairs/bundle. 144 bundles/carton.

CHARACTERISTICS

- High level of protection
- Durable
- Good grip

FUNCTIONS

- Protection against chemicals
- Approved for handling foodstuffs
- Phthalate-free
- Latex-free
- Oil and grease resistant
- Waterproof

PREVENTS RISK OF

Corrosive injuries, Contact with dirt, Contact with chemicals, Contact with oil and fat

PRIMARY ENVIRONMENTS OF USE

Chemical risk environments, Microbiological risk environments, Environments hazardous to health, Corrosive environments, Wet environments, Oily and greasy environments, Dirty environments, Harsh environments

PRIMARY AREAS OF USE

Agricultural work, Chemical technology work, Chemical work, Cleaning, Food handling, Laboratory work, Paint spraying work, Painting, Paper industry work, Tiling

PRIMARY INDUSTRIES OF USE

Agriculture, forestry and fishing, Oil and gas extraction, Food and beverage processing, Pulp and paper, Chemical and petrochemical industry, Rubber and plastics manufacturing, Automotive manufacturing, Facility management services

TYPE OF WORK

Medium weight

CHEMICAL RESISTANCE

According to EN16523-1:2015. For details, please contact Ejendals.

SPECIFICATION

TYPE Chemical protection gloves

CATEGORY Cat. III

COLLECTION Chemforce

THICKNESS 0,38 mm

LENGTH 310 mm

DEXTERITY 5

INSIDE Flock-lined

GRIP DESIGN Raised diamond grip pattern

COLOUR Green

PAIRS PER: BUNDLE/CARTON 12/144

DISPLAY TYPE Bulk pack

DIPPING MATERIAL Nitrile

INNER MATERIAL SPECIFICATION Cotton

OUTER MATERIAL SPECIFICATION Nitrile



COMPLIANCE



TP TC 019:2011

EN ISO 21420:2020

EN 388:2016+A1:2018 4101X



FEATURES



Waterproof



Chemical protection

TEST ACCORDING TO EN ISO 374-1:2016

Tested chemical	A	J	K	L	O	T
Permeation level	2	6	6	3	4	6
Degradation %	71,5	17,7	5,4	46,2	6,9	8,3

SIZE		ARTICLE NUMBER	EAN
7	S	18601A-7	7340118487137
8	M	18601A-8	7340118487120
9	L	18601A-9	7340118487113
10	XL	18601A-10	7340118487168
12	3XL	18601A-12	7340118487144

ejendals

Limavägen 28, SE-793 32 Leksand, Sweden

Phone +46 (0) 247 360 00 | info@ejendals.com | order@ejendals.com