

Temp-Tec 332

DESCRIPTION AND GENERAL PROPERTIES

- **Material** Neoprene
- **Length (cm)** 35.5
- **Colour/Color** Black / Blue
- **Interior finish** Knitted thermal protection
- **Exterior finish** Pebbled
- **Size / EAN** 8 9 10
- **Packaging** 1 pair/bag - 6 pairs/carton



PERFORMANCE RESULTS

Certification category 3

CE 0334



111



02XXXX




ACJKL




2212

Legends

EN 388 MECHANICAL HAZARDS

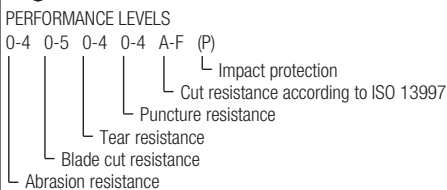

EN 407 THERMAL RISKS heat and fire

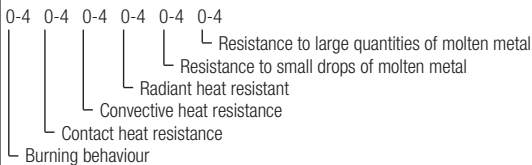

CHEMICAL RISKS

EN ISO 374-1 Type A



U V W X Y Z

- A Methanol
- B Acetone
- C Acetonitrile
- D Dichloromethane
- E Carbon Disulfide
- F Toluene
- G Diethylamine
- H Tetrahydrofurane
- I Ethyl acetate

EN ISO 374-1 Type B



X Y Z

- J n-Heptane
- K Sodium hydroxide 40%
- L Sulphuric acid 96%
- M Nitric acid 65%
- N Acetic acid 99%
- O Ammonia 25%
- P Hydrogen peroxide 30%
- S Hydrofluoric acid 40%
- T Formaldehyde 37%

EN ISO 374-1 Type C



EN 421



RADIOACTIVE CONTAMINATION

MICRO-ORGANISMS

EN ISO 374-5



Protection against bacteria, fungi

EN ISO 374-5



Protection against bacteria, fungi, virus


VIRUS

EN 511



COLD HAZARDS

PERFORMANCE LEVELS



For more details: www.mapa-pro.com

MAPA[®]
PROFESSIONNEL

DESCRIPTION AND GENERAL PROPERTIES

- Multi-purpose chemical resistance (acids, aliphatic solvents) increased by the thickness of the material
- Excellent thermal insulation, due to double-knit cotton
- Good grip of wet or slippery objects, due to embossed texture

MAIN FIELDS OF USE

Petrochemical industry

- Sampling of hot petrochemical products

Rubber industry

- Polymer extrusion

Other industries

- Steam cleaning
- Road works in cold conditions
- Manufacture of insulating electric wires
- Boiler room work
- Manufacture of adhesives
- Handling of moulds in the ceramic industry
- Handling of hot piping

Mechanical industry

- Chemical treatment of metals
- Oil quenching of steel

INSTRUCTIONS FOR USE

Instructions for use

- It is recommended to check that the gloves are suitable for the intended use, because the conditions of use at workplace may differ from the «CE»-type tests. For very high or low temperatures, be careful that a sustained contact does not cause burns.
- It is not recommended for persons sensitized to dithiocarbamates to use these gloves.
- Put the gloves on dry, clean hands.
- Do not use the gloves in contact with a chemical for a duration in excess of the measured breakthrough time. Refer to the website www.mapa-pro.com or contact the Technical Customer Service - MAPA PROFESSIONNEL (stc.mapaspontex@mapaspontex.fr) in order to know this breakthrough time. Use 2 pairs alternatively when in long duration contact with a solvent.
- Turn the cuff end down in order to prevent a hazardous chemical from dripping onto the arm.
- Ensure the inside of the gloves is dry before putting them on again.

Storage conditions

Store the gloves in their original packaging at a temperature not below 5°C.

Laundering conditions

Before taking off the gloves, clean them as appropriate :

- in use with paints, pigments and inks : wipe with a clean cloth dampened with a suitable solvent, and rub over with a dry cloth
- in use with a solvent (dilutents, etc...) : rub over with a dry cloth
- in use with acids or alkalies : thoroughly rinse the gloves under running water, and rub over with a dry cloth

Caution : improper use of the gloves or submitting them to a cleaning or laundering process that is not specifically recommended can alter their performance levels.

LEGISLATION

This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council. This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).

- CE-Type Examination Certificate

0072/014/162/06/98/0129

- Issued by the notified body nr

0072

I.F.T.H. – av. Guy de Collongue - F-69134 ECULLY CEDEX

- Quality assurance certificat

0334 Asqual 14 rue des Reculettes -F-75013 PARIS