

Telblue 351

DESCRIPTION AND GENERAL PROPERTIES

- **Material** PVC
- **Length (cm)** 30
- **Thickness (mm)** 1.50
- **Wrist** Scalloped cuff
- **Colour/Color** Blue
- **Interior finish** Textile support
- **Exterior finish** Pebbled
- **Size / EAN** 8 9 10
- **Packaging** - 12 pairs/bag - 72 pairs/carton
- **Complementary information** Guaranteed without silicone



PERFORMANCE RESULTS

Certification category 3

CE 0334




AKL


4121

Legends

EN 388 MECHANICAL HAZARDS

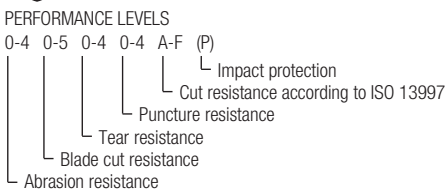

EN 407 THERMAL RISKS heat and fire

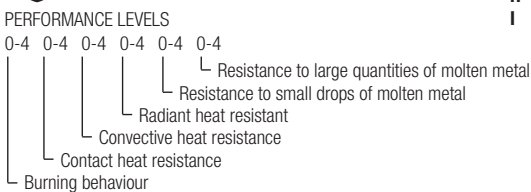

CHEMICAL RISKS

EN ISO 374-1 Type A



U V W X Y Z

- A Methanol
- B Acetone
- C Acetonitrile
- D Dichloromethane
- E Carbon Disulfide
- F Toluene
- G Diethylamine
- H Tetrahydrofurane
- I Ethyl acetate

EN ISO 374-1 Type B



X Y Z

- J n-Heptane
- K Sodium hydroxide 40%
- L Sulphuric acid 96%
- M Nitric acid 65%
- N Acetic acid 99%
- O Ammonia 25%
- P Hydrogen peroxide 30%
- S Hydrofluoric acid 40%
- T Formaldehyde 37%

EN ISO 374-1 Type C



EN 421



RADIOACTIVE CONTAMINATION

MICRO-ORGANISMS

EN ISO 374-5



Protection against bacteria, fungi

EN ISO 374-5




Protection against bacteria, fungi, virus

VIRUS



COLD HAZARDS

PERFORMANCE LEVELS



For more details: www.mapa-pro.com

MAPA[®]
PROFESSIONNEL

DESCRIPTION AND GENERAL PROPERTIES

- Exceptional comfort and good resistance to cold, due to the seamless cotton-knit
- Good resistance to oils, greases and hydrocarbons
- Suitable for food contact, except fatty foods

MAIN FIELDS OF USE**Other industries**

- Pharmaceutical industry: maintenance and cleaning
- Maintenance in wet environments

Mechanical industry

- Maintenance in wet environments (water, oil, greases, hydrocarbons)

INSTRUCTIONS FOR USE**Instructions for use**

- It is recommended to check that the gloves are suitable for the intended use, because the conditions of use at workplace may differ from the «CE»-type tests.
- Put the gloves on dry, clean hands.
- Do not use the gloves in contact with a chemical for a duration in excess of the measured breakthrough time. Refer to the website www.mapa-pro.com or contact the Technical Customer Service - MAPA PROFESSIONNEL (stc.mapaspontex@mapaspontex.fr) in order to know this breakthrough time. Use 2 pairs alternatively when in long duration contact with a solvent.
- Turn the cuff end down in order to prevent a hazardous chemical from dripping onto the arm.
- Inspect the gloves for cracks or snags before reusing them.

Storage conditions

Store the gloves in their original packaging protected from humidity and heat.

Laundering conditions

Before taking off the gloves, clean them as appropriate :

- in use with paints, pigments and inks : wipe with a clean cloth dampened with a suitable solvent, and rub over with a dry cloth
- in use with acids or alkalies : thoroughly rinse the gloves under running water, and rub over with a dry cloth

- Caution : improper use of the gloves or submitting them to a cleaning or laundering process which is not specifically recommended can alter their performance levels.

Drying conditions

Ensure the inside of the gloves is dry before putting them on again.

LEGISLATION

This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council. This product contains more than 0.1% of di ethyl hexyl phtalate according to the regulation n° 1907/2006 of the European parliament and of the Council concerning the Registration, Evaluation, Authorization and Restriction of Chemicals (REACH).

- CE-Type Examination Certificate

0075/014/162/11/07/0415

- Issued by the notified body nr

0075

C.T.C. – 4 rue H FRENKEL - F-69367 LYON CEDEX 07

- Quality assurance certificat

0334 Asqual 14 rue des Reculettes -F-75013 PARIS