

greenly

2025-09-18

Lyreco LCA

Life Cycle Assessment

The methodology in this report is based on ISO 14040

7994283 (sold in CH)

Summary



01 | Methodology



02 | Results

01

Methodology

Environmental Impact Assessment

<p>Functional unit</p>	<p>The functional unit is a quantified performance of a product system for use as a reference unit. One of the primary purposes of a functional unit is to provide a reference to which the input and output data are normalized (in a mathematical sense). The functional unit of this analysis is "125 page(s) of A4 paper for writing".</p>
<p>Impact Indicator</p>	<p>The impact is measured through the "IPCC 2013 GWP 100a" method.</p>
<p>Electricity impact calculation method</p>	<p>Following guidelines from the GHG Protocol, the impact of electricity is calculated using the location-based approach. This means that the emission factors used represent the average annual carbon intensity of the power grid in the country the processes take place in.</p>
<p>Hypothesis</p>	

Environmental Impact Assessment

System Boundaries

The scope of this research includes the complete lifecycle of a piece of paper from raw material extraction to disposal options for each material, which is the cradle-to-grave perspective.

Exclusions


The impact of secondary packaging impact and writing utensils are excluded from this assessment.

02

Results

7994283 (sold in CH)

Climate Change

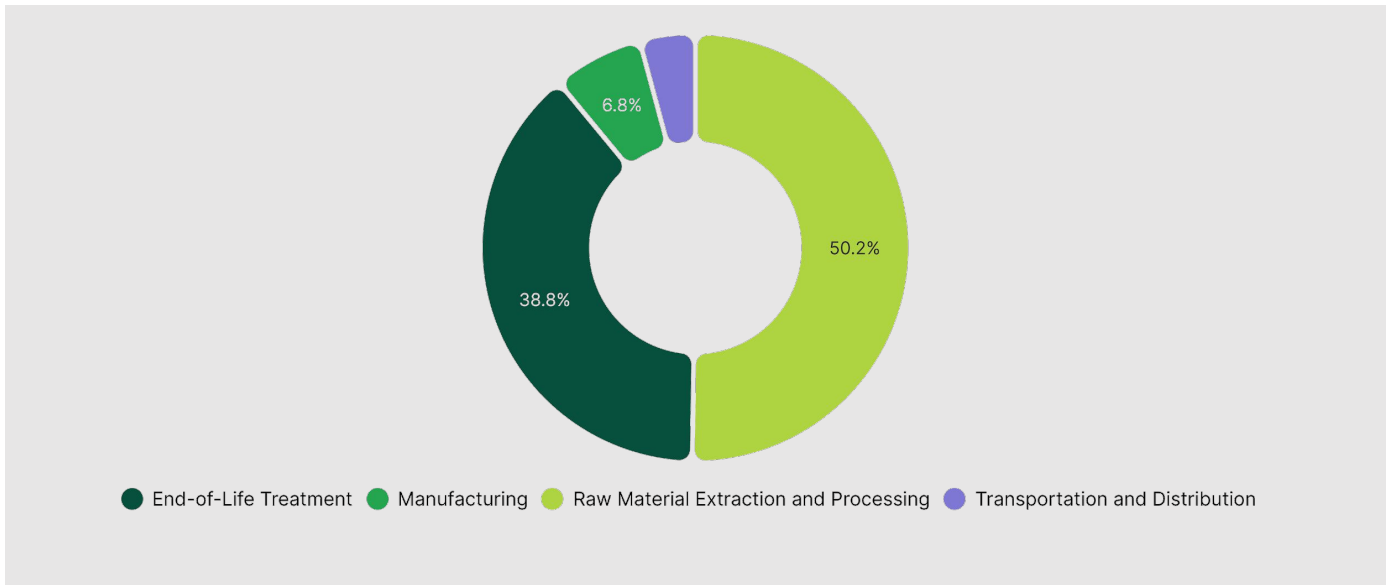

Step	Impact (kg CO ₂ eq)	Percentage (%)
Raw Material Extraction and Processing	1.79	50.23 %
End-of-Life Treatment	1.38	38.78 %
Manufacturing	0.24	6.80 %
Transportation and Distribution	0.15	4.19 %
TOTAL	3.56	100.00 %

7994283 (sold in CH)

Climate Change - Raw Material Extraction and Processing



Activity	Emission Factor Num	Quantity	Impact (kg CO ₂ eq)	Percentage (%)
Sourcing of raw material (bleached kraft paper)	1	3.6	1.79	100.00 %
TOTAL			1.79	100.00 %

7994283 (sold in CH)

Climate Change - Manufacturing



Activity	Emission Factor Num	Quantity	Impact (g CO ₂ eq)	Percentage (%)
Natural gas usage during material transformation (bleached kraft paper)	3	0.68	123.64	51.03 %
Electricity usage during material transformation (bleached kraft paper)	2	1.27	118.65	48.97 %

--	--	--	--	--

--	--	--	--	--

TOTAL			242.29	100.00 %
-------	--	--	--------	----------

7994283 (sold in CH)

Climate Change - End-of-Life Treatment



Activity	Emission Factor Num	Quantity	Impact (kg CO ₂ eq)	Percentage (%)
End of life (bleached kraft paper)	5	2.4	1.38	100.00 %
TOTAL			1.38	100.00 %

Contact us

Alexis Normand CEO

www.greenly.earth