

PRODUCT DATA SHEET

DUST MASK My-T-Gear MASK 512



PRODUCT SPECIFICATION

The My-T-Gear MASK 512 is preformed and equipped with a flanged edge to secure facial seal. The design is ergonomic and allows to fit more facial shapes and sizes.

- Excellent filter material for low breathing resistance
- Softer outer and inner layer for comfortable fit
- Individually adjustable nose clip for excellent fit
- An inside foam is adapted to provide better secured seal
- One-way valve reduces heat and moisture accumulate inside the mask for better comfort
- Can be easily equipped with safety goggle, helmet, glasses, earmuffs, and other eye-wears
- Packed in a box of 10 pieces, 12 boxes in a carton

Item code 20641421

EAN: 8713082035038

For manual and declaration of conformity:



Certifications:

EN 149:2001 + A1:2009, FFP2 NR

NPF:12



Category 3 PPE in accordance with EU Regulation 2016/425/EEC for Personal Protective Equipment.


PRODUCT DATA SHEET

DUST MASK My-T-Gear MASK 512



Storage and Transportation

The My-T-Gear 500 Series Particulate Respirators have a shelf life of five (5) years. End of shelf life is marked on the product packaging. Before initial use, always check that the product is within the stated shelf life (use by date). Product should be stored in clean, dry conditions within the temperature range: -5°C to +50°C with a maximum relative humidity of <75%. When storing or transporting this product use original packaging provided.

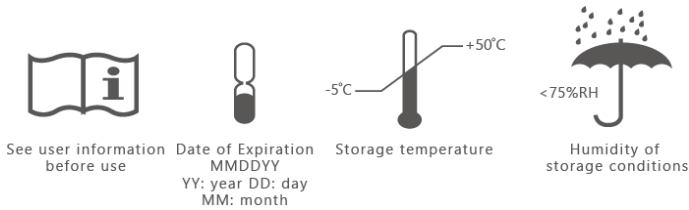

Limited Warranty

This limited warranty is made in lieu of the warranties of merchantability, fitness for particular purposes and all other warranties, express or implied. There are no other warranties which extend beyond the description on the face hereof. The physical standards and specifications of the manufacturer will be met by products sold.

Exclusive Remedies: damages for the breach of this limited warranty are limited to the replacement of such quantity of products proved to be defectively manufactured. Except as provided above, the manufacturer shall not be liable or responsible for any loss, damage, or liability, direct, indirect, incidental, special or consequential, arising out of sale, use, misuse or the inability to use products by the user.

Service Time Limitation

Leave contaminated area and remove respirator if breathing becomes difficult or proper fit cannot be obtained or the respirator is damaged, soiled, or distorted. Do not use the same respirator again once removed.

The maximum service time of this respirator is five (5) consecutive calendar days (including days of non-use), beginning from the first day of use.

Warnings

1. A properly selected respirator is essential to protect your health. Before using this product consult a safety professional to determine its suitability for your intended application.
2. As with any respiratory device, the wearer MUST be adequately trained prior to use. Before use, the wearer should always check the mask is in good condition - no dirt, no damage of head-strap attachment etc.
3. This product does not protect the wearer against gases, vapors or mist whose liquids produce harmful vapors or gases.
4. Do not use in sandblasting operations.
5. This product does not supply oxygen. Use this respirator only in well-ventilated areas containing sufficient oxygen (at least 19.5%) to support life.
6. Do not use when contaminant and the concentration are unknown or immediately dangerous to life and health.
7. Leave work area immediately if: a) breathing becomes difficult, b) dizziness or other distress, c) the respirator becomes damaged or d) an emergency occurs.
8. If user has any illness or discomfort, consult a licensed medical doctor to determine suitability of use.
9. Facial hair and certain facial characteristics will prohibit effective use of this product.
10. Replace a respirator when the breathing resistance become excessive due to dust loading or after a maximum of 8-hours usage, "single shift use".
11. Failure to observe all warnings and instructions on the use of this respirator may result in serious illness or permanent injury.
12. The equipment should not act as an ignition source but it should not be use in explosive atmospheres as the concentration of contaminants within normal flammability range would exceed the limits in the selection guide.
13. Store respirator in a sealed container away from contaminated areas when not in use.
14. Store respirator in the original packing during transport.
15. Please make sure the mask fits properly before entering working environment.

Customer Service Nederland

T: +31 (0)78 618 14 00 of

E: info@intersafe.eu

Customer Service België

T: +32 (0)15 423 320

E: info-b@intersafe.eu