

# EVOLite®

MIDPEAK - WHEEL RATCHET - VENTILATED

PRODUCT CODE: AJB170-00 \_ \_ 00

THE LIGHTEST SAFETY HELMET AVAILABLE IN EUROPE

## TECHNICAL SPECIFICATION

### HEAD PROTECTION

#### SHELL:

High strength engineering grade ABS which has been UV Stabilised

### INSTRUCTIONS FOR USE

Fit helmet on head and fasten strap to ensure fit

For adequate protection this helmet must be worn with peak facing forward


Ensure the helmet is adjusted to the size of the user's head

#### WEBBING HARNESS:

HDPE Strap & Webbing Clips with Polyester Webbing Straps

#### CHAMLON™ SWEATBAND:

Egyptian cotton core with porous PU coating for maximum sweat absorption. PH neutral, dermatologically tested

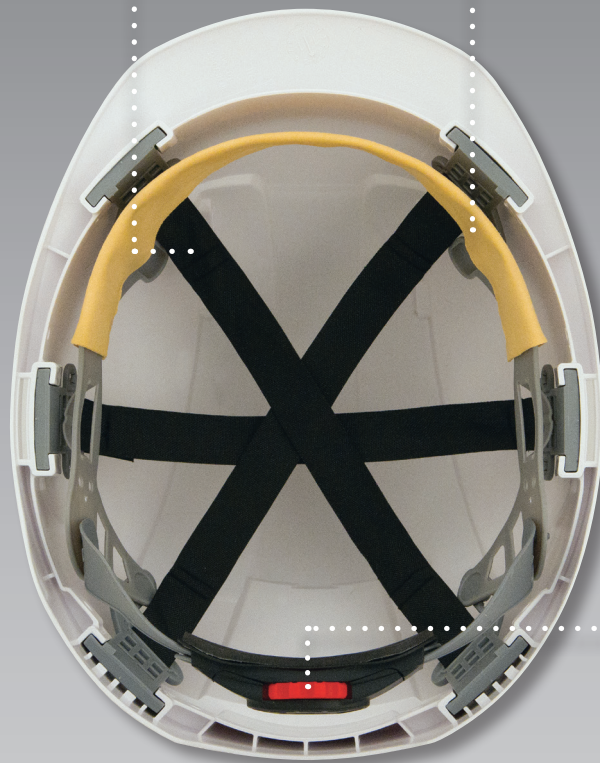

#### WHEEL RATCHET:

The Revolution® Wheel Ratchet is the new easy to use wheel ratchet adjustment system to create a firm comfort fit with added security



### CLEANING & MAINTENANCE

The unit may be cleaned with soap and warm water and dried with a soft cloth

The helmet should not be cleaned with chemical or abrasive cleaners

The helmet should be stored out of direct sunlight

The helmet should be stored away from chemicals and extremes of temperature

### CONFORMITY

EN 397 & GOCT P 50460-92 for Industrial Safety Helmets

EC Certificate Number 00279, issued by BSi Product Certification

Meets optional Lateral Deformation performance

Wide size range. Slip or wheel ratchet - High comfort fit

Available vented. Available with mid or micro peak

Company personalisation available by printing

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email [technical@jsp-safety.com](mailto:technical@jsp-safety.com).



MANUFACTURING FOR SAFETY  
[WWW.JSPSAFETY.COM](http://WWW.JSPSAFETY.COM)



UKSALES@JSPSAFETY.COM  
TEL: +44 (0)1993 826050



Issued 15/01/19, V8

# EVO Lite®

MIDPEAK - WHEEL RATCHET - VENTILATED

PRODUCT CODE: AJB170-00 \_ \_ 00

THE LIGHTEST SAFETY HELMET AVAILABLE IN EUROPE

## TECHNICAL SPECIFICATION

### HEAD PROTECTION



### DIMENSIONS OF OUTER PACKAGING

Quantity: 10

Weight: 3.2kg (Approx.)

HEIGHT:  
450mm



WIDTH:  
240mm

LENGTH:  
580mm

### DIMENSIONS OF HELMET

Size: 530 - 640mm

Weight: 299g (Approx.)



### HELMET COLOURS

Insert the following two digit number in place of the dashes in the product code of your desired helmet



01 White 02 Yellow 03 Green 05 Blue 06 Red 08 Orange

|                        |  |   |
|------------------------|--|---|
| EN STANDARD            | EN397  | Yes   |
| PERFORMANCE            | Impact Resistance<br>Lateral Deformation                           | Yes 50 Joules<br>Yes                                |
| TEMPERATURE RESISTANCE | +50°C<br>Low Temperature   | Yes<br>Yes:<br>EN397 -30°C<br>ГОСТ Р 50460-92 -30°C |
| SHELL MATERIAL         | ABS<br>Recyclable<br>UV Stabilised                                 | Yes<br>Yes<br>Yes                                   |
| HARNESS MATERIAL       | HDPE<br>Textile  | Yes<br>Yes  |
| OPTIONS                | Universal Accessories<br>Reflective CR2 option<br>Integral Eyewear | Yes<br>Yes<br>Yes                                   |
| HARNESS SYSTEM OPTIONS | JSP 3D<br>Wheel Ratchet<br>6 pts                                   | Yes<br>Yes<br>Yes                                   |
| CHINSTRAP OPTIONS      | 4 pts<br>2 pts   | Yes<br>Yes  |
| LOGO OPTIONS           | Front<br>Rear<br>Side<br>MOQ Logo<br>Individual Name               | Yes<br>Yes<br>Yes<br>10<br>Yes                      |

### LIMITATIONS OF USE

Protection will only be offered if the helmet is fitted correctly

Any helmet subjected to severe impact should be replaced immediately. Do not apply paint, solvents or adhesive labels except in accordance with instructions from the manufacturer

The harness, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the helmet and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email [technical@jgpsafety.com](mailto:technical@jgpsafety.com).



MANUFACTURING FOR SAFETY  
[WWW.JGPSAFETY.COM](http://WWW.JGPSAFETY.COM)

UKSALES@JGPSAFETY.COM  
TEL: +44 (0)1993 826050



Issued 15/01/19, V9