

CONDOR II [OB E SRC]

UNISEX: 22270 BLACK | SIZE: EU 35-48, UK 2.5-13 | EN ISO 20347:2012 [OB E SRC]



OB SRC ESD CE UK CA CE CERTIFIED OB E SRC according to EN ISO 20347-2012



Removable cushioned EVA infused insole



Energy absorbing heel construction

WATER RESISTANT
designed to repel water and keep your feet dry.

SPILLGUARD
- Helps protect against hot liquid spills.

Metal Free

EXTREMELY SLIP-RESISTANT SFC OUTSOLE.

TRIPGUARD


- Allows ease of movement between different surfaces.
- Added depth for improved durability and wear time.
- Larger surface covered by the outsole provides better slip-resistance.

Weight (per shoe):
468 grams
(based on size 42)

DATA GUIDE


| | |
|-------------------|------------------------------|
| Certification: | EN ISO 20347:2012 [OB E SRC] |
| Upper Material: | Leather/Mesh |
| Lining Material: | Polyester |
| Midsole Material: | Rubber |
| Outsole Material: | Rubber |
| Laces: | N/A |
| Safety Toe Cap: | N/A |
| COO: | China |

Standard requirement

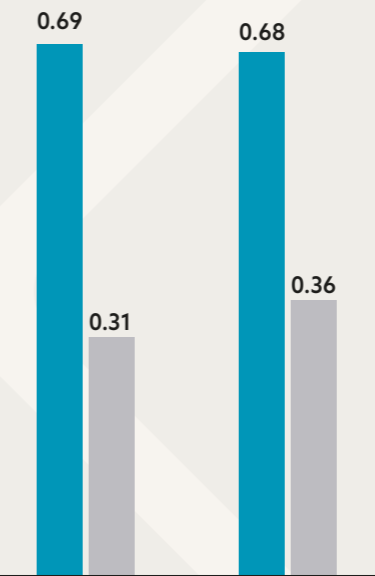

Ceramic + Sodium Lauryl Sulphate

Forward heel slip Backward forepart slip



SR requirement



Ceramic + Glycerine

Forward heel slip Backward forepart slip



Slip resistance test according to EN ISO 20344:2021, conducted by Intertek Testing Services Shenzhen Ltd., in August 2022; on a scale of 0.0 (without slip resistance) to 1.0 (very high level of slip resistance, e. g. on dry carpeted floors). All SFC shoes are fitted with the patented, slip-resistant Shoes For Crews outsole. Tested product: Carrig Low 62201.