

## FEEL THE SW DIFFERENCE

# DESIGNED TO ENHANCE WORKER PERFORMANCE.




#### PF-95TL

POWDER-FREE ECOTEK BIODEGRADABLE NITRILE EXAMINATION GLOVES\*

#### VERSATILE BIODEGRADABLE 5 MIL SINGLE-USE GLOVE COMBINES MAXIMUM COMFORT AND CONTROL WITH HIGH-QUALITY CONSTRUCTION

- EcoTek<sup>®</sup> Biodegradable Technology accelerates landfill breakdown without any performance loss\*
- Silicone-free for critical environments
- Exceeds 1.5 AQL laboratory standards

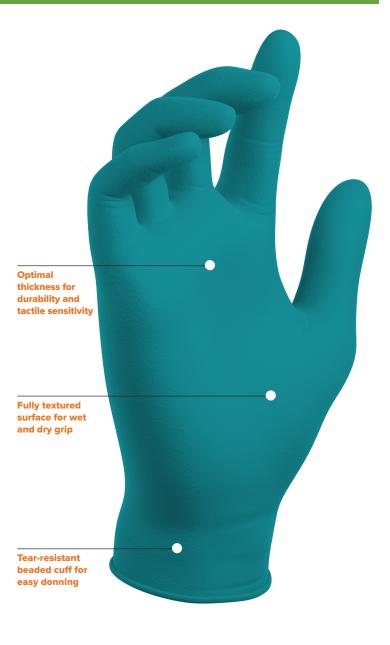



Feel the difference.

33278 Central Avenue, Unit 102, Union City, CA 94587, USA Tel: +1.510.429.8692 | Fax: +1.510.487.5347

ademarks and registered trademarks are the property of SW and its affiliates 2022 SW. All rights reserved.



#### **TECHNICAL DATA**



POWDER-FREE ECOTEK BIODEGRADABLE NITRILE EXAMINATION GLOVES\*

#### **PRODUCT DESCRIPTION**

| SPECIFICATIONS |        |                  |        |  |
|----------------|--------|------------------|--------|--|
| PRODUCT        |        | PowerF           | orm®   |  |
| GRADE          |        | Powder-Free Exam |        |  |
| MATERIAL       |        | Nitrile          |        |  |
| THICKNESS      | FINGER | 5.8mil           | 0.15mm |  |
|                | PALM   | 5.0mil           | 0.13mm |  |
|                | CUFF   | 3.9mil           | 0.10mm |  |
| COLOR          |        | Teal             |        |  |
| SURFACE        |        | Fully Textured   |        |  |
| LENGTH         |        | 9.5"             | 242mm  |  |
| WEIGHT         |        | 6.5g             |        |  |
| FIT TYPE       |        | Ambidextrous     |        |  |
| CUFF TYPE      |        | Beaded           |        |  |
| WATERTIGHT AQL |        | 1.5              |        |  |
| ORIGIN COUNTRY |        | China            |        |  |

#### PHYSICAL PROPERTIES PRE-AGING POST-AGING TENSILE STRENGTH: 20 MPA 21 MPA ELONGATION: 560% 540%

#### **INTEGRATED TECHNOLOGIES**

ECOTEK Biodegradable Technology: 92.6% biodegradable in 2.5 years. ASTM D5526-12 test results do not predict future biodegradation.\*

100% Air Inspected

Clean Washed





\* Specifications based on size Large glove

#### **STANDARDS & CERTIFICATIONS**

EN ISO 21420:2020 EN 455-2000-2015 ASTM D6319-19 ASTM D6978-05 (2019) ASTM F1671-13 ASTM F739-12 Reach EU 1907/2006

EU 2016/425 CAT III Complex Design



### **APPLICATIONS**

INDUSTRIAL Food Handling and Packaging

Janitorial Maintenance

Refinary/Oil

MEDICAL **Chemical Handling** 

Please visit swsafety.com/symbols for information on standards used on this document.

#### ORDERING

| ITEM NO. | SIZE         | PALM WIDTH | PACKAGING                            |  |
|----------|--------------|------------|--------------------------------------|--|
| N200361  | XS 5½ – 6    | 3.0" 75mm  | 100 gloves per box 10 boxes per case |  |
| N200362  | S 6½ – 7     | 3.5" 89mm  | 100 gloves per box 10 boxes per case |  |
| N200363  | M 7½ – 8     | 3.8" 98mm  | 100 gloves per box 10 boxes per case |  |
| N200364  | L 8½ – 9     | 4.3" 108mm | 100 gloves per box 10 boxes per case |  |
| N200365  | XL 9½ – 10   | 4.6" 116mm | 100 gloves per box 10 boxes per case |  |
| N200366  | 2XL 10½ – 11 | 4.9" 124mm | 100 gloves per box 10 boxes per case |  |





R\_N20036X1121



33278 Central Avenue, Unit 102, Union City, CA 94587, USA Tel: +1.510.429.8692 | Fax: +1.510.487.5347 rademarks and registered trademarks are the property of SW and its affiliates 2022 SW. All rights reserved.



\*Under test method ASTM D5526-12, a standard test method for determining anaerobic biodegradation of plastics in accelerated landfill conditions. Current biodegredation results do not predict future results.