



USB back-to-back extension lead



HIGH GLOSS USB

POWER

power and charge your USB devices with sockets protected against damaging surges and spikes

FEATURES

- Two USB ports (2.1A shared)
- Protects valuable electrical equipment from surges and spikes
- Unlimited value, 3 year connected equipment warranty
- Compact back-to-back design
- LED power and surge indicators
- Wall fixing option



PRODUCT IMAGES




SRGDU6xPB2



SRGDU6xPW2

LINE DIAGRAMS

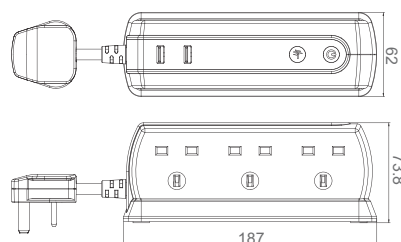

PRODUCT INFORMATION

Part Number	SRGDU6xPy2
Part Number Note	x = length of cable in metres, y = colour
Product Dimensions	Height 74mm x Width 187mm x Depth 62mm
Sockets	6

TECHNICAL SPECIFICATIONS

Standard(s)	This product is certified to applicable British safety standards BS5733, BS EN 60950-1
Wall Mounting Option	Yes
Maximum Load (Wattage)	13A: 3120 Watts, 240 Volts
IF IN DOUBT CONSULT A QUALIFIED ELECTRICIAN	



SURGE TECHNICAL DATA

Protection	3 x 14 MOV + 1 x GDT
Maximum Surge Energy	375 Joules
Maximum Surge Current	13500 Amps
Clamping Voltage	775 Volts
Response Time	< 10nS
Thermal Cut Out	Yes
Protection	L-N, L-E, N-E
Surge Protection Indicator	Yes - White
Power Indicator	Yes - Blue

SAFETY WARNING

PLEASE READ CAREFULLY AND USE IN ACCORDANCE WITH OUR SAFETY INSTRUCTIONS BELOW

- | | | | |
|--|---|--|---|
| <input checked="" type="checkbox"/> DO | Uncoil cable before use | <input checked="" type="checkbox"/> DON'T | Allow heavy tools etc to hang unsupported on the cable or from the socket |
| <input checked="" type="checkbox"/> DO | Position the cable carefully to avoid accidents | <input checked="" type="checkbox"/> DON'T | Remove the plug and wire directly into a mains supply |
| <input checked="" type="checkbox"/> DON'T | Use in wet conditions | <input checked="" type="checkbox"/> DON'T | Exceed the total maximum load. |

Masterplug Help Line

03300 249 279

Supplied by
Luceco PLC

Stafford Park 1 Telford TF3 3BD ENGLAND

Visit our website at

www.masterplug.com