

greenly

2025-09-18

Lyreco LCA

Life Cycle Assessment

The methodology in this report is based on ISO 14040

3917601 (sold in IT)

Summary



01 | Methodology



02 | Results

01

Methodology

Environmental Impact Assessment

Functional unit	<p>The functional unit is a quantified performance of a product system for use as a reference unit. One of the primary purposes of a functional unit is to provide a reference to which the input and output data are normalized (in a mathematical sense). The functional unit of this analysis is "500 page(s) of A4 paper for writing".</p>
Impact Indicator	<p>The impact is measured through the "IPCC 2013 GWP 100a" method.</p>
Electricity impact calculation method	<p>Following guidelines from the GHG Protocol, the impact of electricity is calculated using the location-based approach. This means that the emission factors used represent the average annual carbon intensity of the power grid in the country the processes take place in.</p>
Hypothesis	

Environmental Impact Assessment

System Boundaries

The scope of this research includes the complete lifecycle of a piece of paper from raw material extraction to disposal options for each material, which is the cradle-to-grave perspective.

Exclusions


The impact of secondary packaging impact and writing utensils are excluded from this assessment.

02

Results

3917601 (sold in IT)


Climate Change

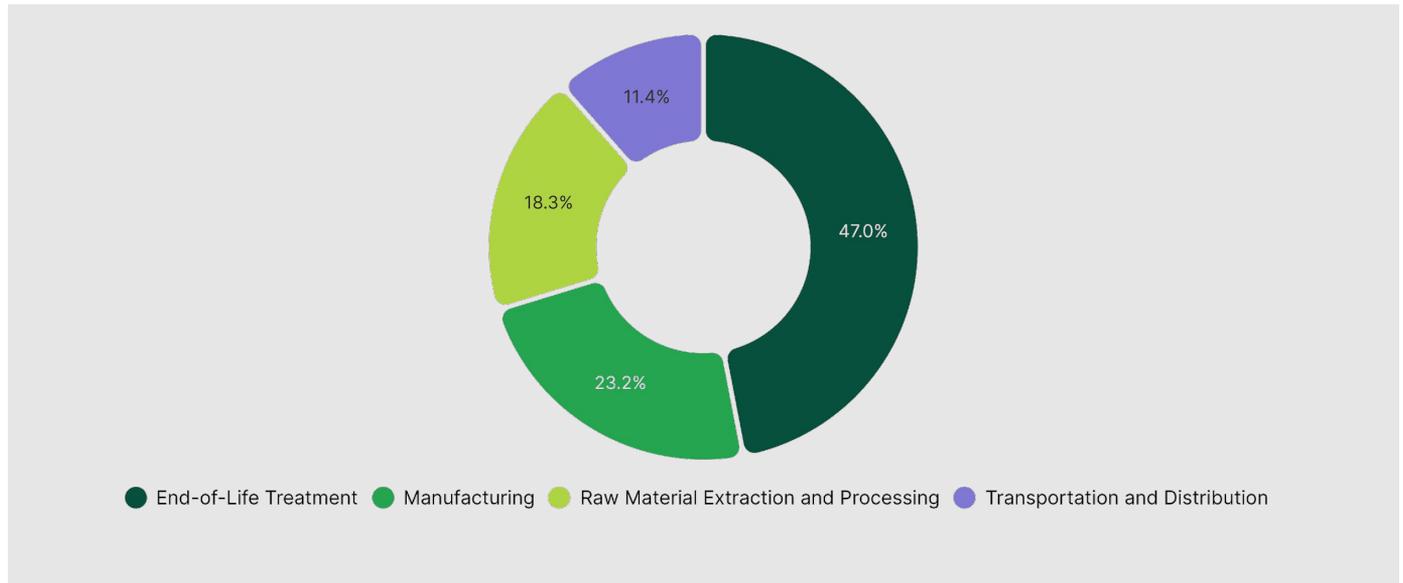

Step	Impact (kg CO ₂ eq)	Percentage (%)
End-of-Life Treatment	1.44	47.00 %
Manufacturing	0.71	23.23 %
Raw Material Extraction and Processing	0.56	18.34 %
Transportation and Distribution	0.35	11.43 %
TOTAL	3.06	100.00 %

3917601 (sold in IT)


Climate Change - Raw Material Extraction and Processing

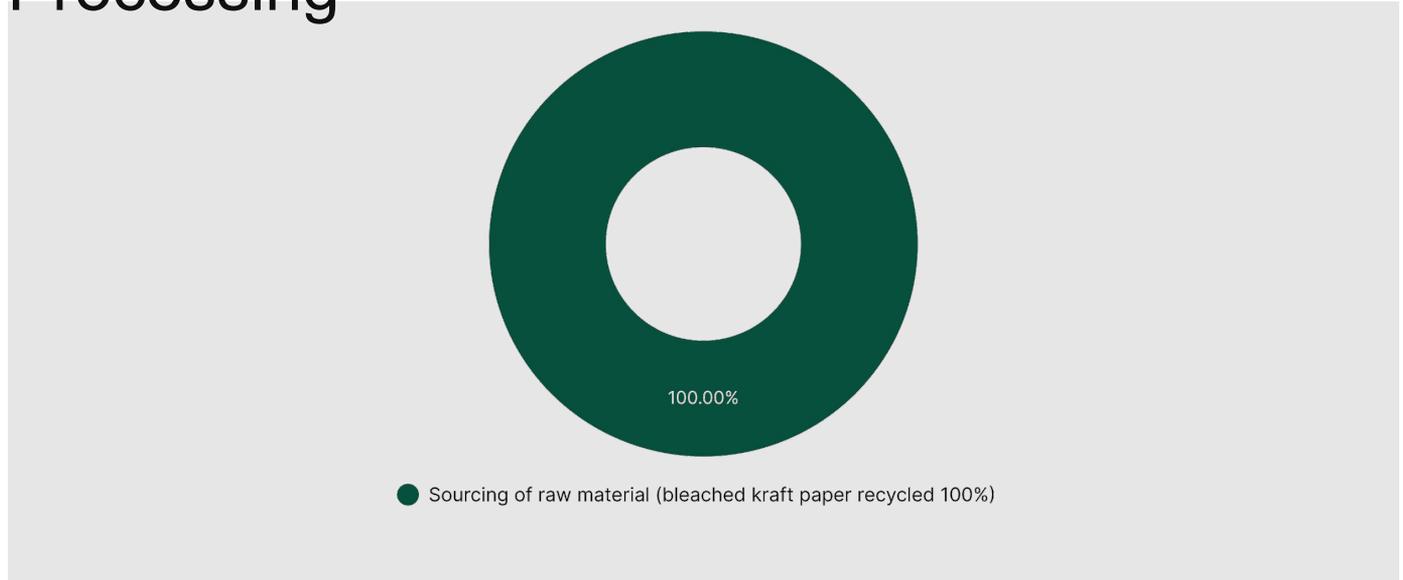

Activity	Emission Factor Num	Quantity	Impact (g CO ₂ eq)	Percentage (%)
Sourcing of raw material (bleached kraft paper recycled 100%)	1	3.74	561.6	100.00 %
TOTAL			561.6	100.00 %

3917601 (sold in IT)


Climate Change - Manufacturing

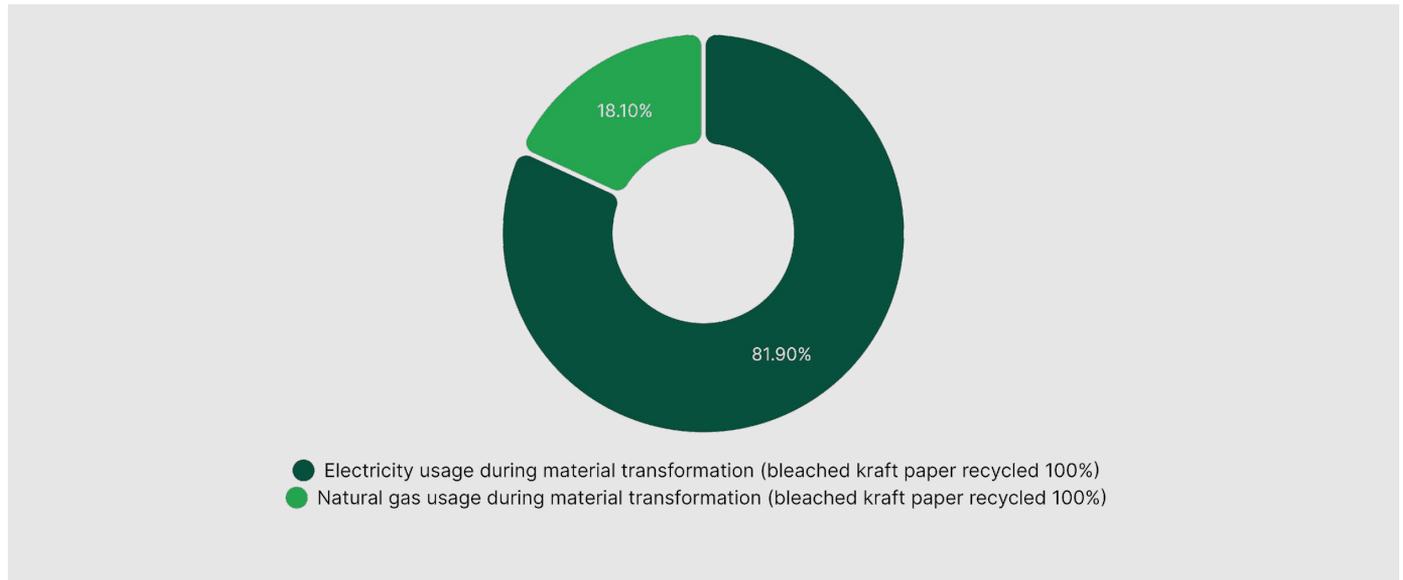

Activity	Emission Factor Num	Quantity	Impact (g CO ₂ eq)	Percentage (%)
Electricity usage during material transformation (bleached kraft paper recycled 100%)	2	1.32	582.47	81.90 %
Natural gas usage during material transformation (bleached kraft paper recycled 100%)	3	0.71	128.76	18.10 %
TOTAL			711.23	100.00 %

3917601 (sold in IT)

Climate Change - End-of-Life Treatment

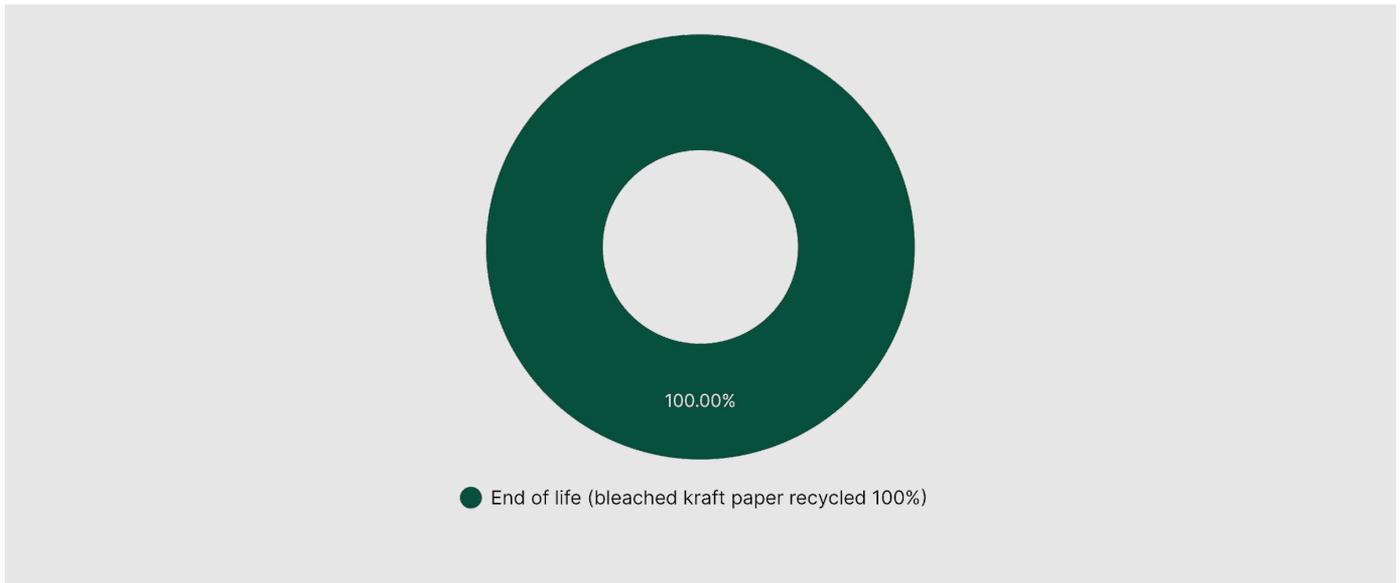

Activity	Emission Factor Num	Quantity	Impact (kg CO ₂ eq)	Percentage (%)
End of life (bleached kraft paper recycled 100%)	5	2.5	1.44	100.00 %
TOTAL			1.44	100.00 %

Contact us

Alexis Normand CEO

www.greenly.earth