CHEMICAL PROTECTION > Neoprene

Neotex 340

DESCRIPTION AND GENERAL PROPERTIES

- Material Neoprene and natural latex
- Length (cm) 38
- Thickness (mm) 1.15
- Wrist Scalloped cuff
- Colour/Color Black
- Interior finish Textile support
- Exterior finish Smooth
- Size / EAN 7 8 9 10
- Packaging 1 pair/bag 5 pairs/box 50 pairs/carton
- Complementary information Guaranteed without silicone



PROFESSIONNEL

www.mapa-pro.com


PERFORMANCE RESULTS

Certification category 3





3121

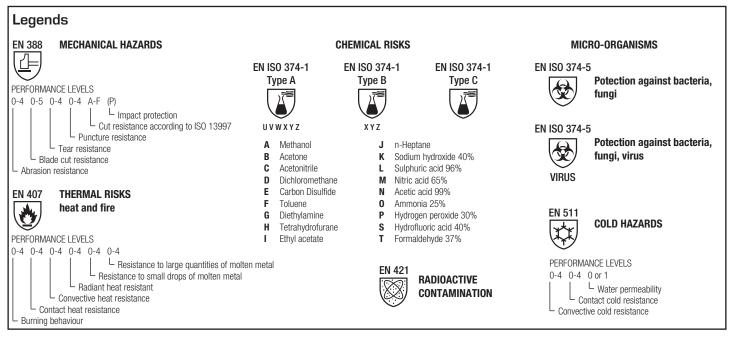

For more details: www.mapa-pro.com



DESCRIPTION AND GENERAL PROPERTIES

- Suitable for long-term wear; added comfort of textile support
- Great dexterity, due to the gloves reduced thickness

MAIN FIELDS OF USE

Automotive/mechanical industry

· Battery, pump, and compressor manufacturing

Other industries

- Timber treatment
- Industrial cleaning, maintenance
- Chemical industry
- Handling and transporting chemicals

INSTRUCTIONS FOR USE

Instructions for use

- •It is recommended to check that the gloves are suitable for the intended use, because the conditions of use at the workplace may differ from the «CE»-type tests.
- •It is not recommended for persons sensitized to natural latex, , thiazoles and dithiocarbamates to use these gloves.
- •Put the gloves on dry, clean hands.
- •Do not use the gloves in contact with a chemical for a duration in excess of the measured breakthrough time. Refer to the website www. mapa-pro.com or contact the Technical Customer Service - MAPA PROFESSIONNEL (stc.mapaspontex@mapaspontex.fr) in order to know this breakthrough time. Use 2 pairs alternatively when in long duration contact with a solvent.
- •Turn the cuff end down in order to prevent a hazardous chemical from dripping onto the arm.
- •Inspect the gloves for cracks or snags before reusing them.

Storage conditions

Store the gloves in their original packaging at a temperature not below 5°C.

Laundering conditions

- Before taking off the gloves, clean them as appropriate :
- •in use with paints, pigments and inks : wipe with a clean cloth dampened with a suitable
- solvent, and rub over with a dry cloth
- •in use with a solvent (diluents, etc...) : rub over with a dry cloth
- •in use with acids or alkalines : thoroughly rinse the gloves under runningwater, and rub over with a dry cloth

Caution : using the gloves or submitting them to another cleaning or laundering process can alter their performance levels. **Drying conditions**

Ensure the inside of the gloves is dry before putting them on again.

LEGISLATION

This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council. This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).

• CE-Type Examination Certificate

0075/014/162/09/09/0411

- Issued by the notified body nr
- nr. 0075
- C.T.C 4, rue Hermann Frenkel 69367 Lyon cedex 07 France
- Quality assurance certificat

0334 Asqual 14 rue des Reculettes -F-75013 PARIS

