Chameleon Harmonica Workwall



- Specifications -





General

Article number	Description	Size	Surface	Nett weight
14013.310	3-pc frame	3540 x 1960 mm (BxH)	-	± 65 Kg
16001.899	Writing surface	1180 x 1850 mm (BxH)	Enamel surface of choice	± 26 kg
11208.997	Acoustic pinnig surface	1180 x 1850 mm (BxH)	PET-Felt, colour of choice	± 9,8 kg

Surfaces Enamel

Material type	Application	Advantages	Miniature
White enamel	Ideal for writing	Top-quality writing surface for whiteboards	
Extra Hygienic Enamel	Ideal for writing in rooms that need an advanced level of hygiene	Top-quality writing surface for whiteboards. Designed to eleminate 99% of bacteria and virusses (including COVID-19) within 24 hours.	
Projection (enamel)	Ideal for projection	Ideal properties for projection without reflection. Wet erase with spray.	
Low Gloss (enamel)	Suitable for writing and projection	A good compromise for writing and projecting on the same surface.	
Chalk grey (enamel)	Using chalks	There is no better base material for chalk boards than this enamelled steel.	e IONS1
Chalk green (enamel)	Using chalks	There is no better base material for chalk boards than this enamelled steel.	
Sublimation steel	Printed whiteboard	Ideal combining the best full- colour images with writing application.	45

Surfaces PET-Felt





Silver grey





Grey









Nature



Antraciet

AP/9-39 Light Oak

Green

Light Blue

Monochrome























AP/9-20

AP/9-32 Off White

Dark Grey

Black

Middle Blue

Dark Blue

AP/9-51 Apple Green

AP/9-05 Yellow

AP/9-56 Orange

AP/9-25 Red

Purple

Technical

Whiteboard panels

Charastaristics:

Magnetic and dry erasable

Suitable for intensive and permanent use

Thickness: Warranty:

2 years

7 mm

Surface warranty:

Lifetime warranty on writability and dry erasability

Warranty sublimated steel surface

2 years

Recyclable product:

80%

80% Recyclable packaging:

Technical

PET-Felt panels

Charastaristics:

Acoustic

Pin-able and magnetic for glass board magnets

Thickness:

9 mm

Acoustic values:

aw 0,25 | NRC 0,30 | Class D

Flammability:

Tested to EN 13501-1:2007 + A1:2009

Density PET-felt:

210 kg/ m³

Warranty:

2 years

Recyclable product:

80%

Recyclable packaging:

80%



Construction

Enamel whiteboard panel

1. Surface	[colour] enamel steel (Indoor Air Quality Certified to SCS-EC10.3-2014 v4.0) / sublimated steel of 0,4 mm
2. Carrier	MDF 6 mm (FSC Mix Credit)
3. Backing	0,4 mm galvanised steel sheet
4. Finishing	Black lacquered edges

PET-Felt panel


1. Surface	PET-Felt panel, 9 mm thick 60% recycled PET bottles, 40% new polyester fibre	
2. Backing	0,4 mm galvanised steel sheet	

Moveable frame

Frame	 Pine wood outer frame, black lacquered Poplar wood inner frame, without lacquer 6 rubust hinges 	
Feet	Blakc powder coated steel	
Wheels	6 rubust black castor wheels, 3 with brake	
Magnetic strips for mounting panels	14 pieces	
Magnetic plates		

for mounting 8 pieces

panels

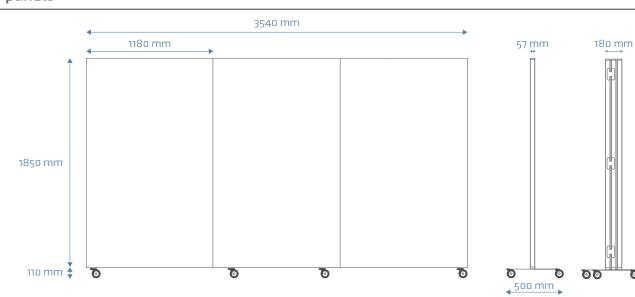



T +31(0)40 - 280 85 00 F +31(0)40 - 286 76 15

E info@smit-visual.nl

W chameleonwriting.com



The mark of responsible forestry FSC* C137061

