


59S[®]
The Pioneer of LED Sterilization


59S[®] UVC LED HANDHELD STERILIZER
MODEL: VHHSTWN



X5
User Manual

INTRODUCTION


This is a portable & rechargeable sterilizer, and very easy to use. It can kill bacteria at sterilization rate of 99.9%. It's clean, ozone free to take good care of your daily accessories!

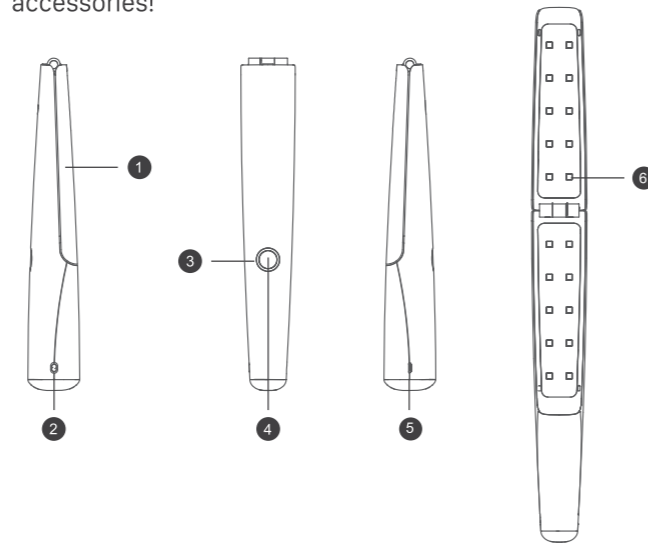


- 1 Flip Panel
- 2 Children Safety Lock
- 3 LED Indicator
- 4 Sterilizing Button
- 5 Input Interface
- 6 UV LED Beads

HOW TO USE


1. Please get it fully charged with a compliance adaptor of Output 5V = 1A.




2. Unlock the children safety lock to "🔓", then unfold the flip panel.



3. Wear the protective goggles firstly, and double click sterilizing button to scan back and forth 5-10 times as a whole sterilization cycle, extra single click will stop sterilizing instantly.



4. Once sterilization completes, fold the flip panel and restore the children safety lock to "🔒".

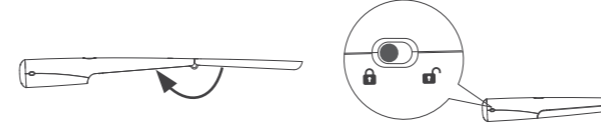

APPLICATION

Sterilization for any of surfaces, such as hotel bedding, bathtubs, cribs, cushions, etc.

SAFETY PROTECTION

Built-in gravity sensing switch, it stops working automatically when the product turned over.

STERILIZING PRINCIPE

UVC LED light kills bacteria by destroying DNA or RNA, to stop them from reproducing and generating.

UVC LED DEODORIZATION

UVC waves can deodorize by decomposing the molecular structure of odor.

INTRODUCTION OF BACTERICIDAL FACTORS AND MICROORGANISM CATEGORIES

The main bactericidal factor and its intensity: UVC light, the average irradiance at a vertical distance of 0 cm and 1cm below the top UVC LED is respectively 2082μW/cm² and 622μW/cm²; killing microorganisms: Escherichia coli, Staphylococcus aureus.

INDICATOR STATEMENT

SN	Working Status	Indicator
★	Charging	Red Light Flickering
★	Stand-by	White Light Dimming
★	Working	White Light Highlighting
★	Low Power	Red Light Flashes

SOUND REMINDER

"beep, beep"	During the whole disinfection process
--------------	---------------------------------------

TECHNICAL PARAMETERS

- Product Name: 59S[®] UVC LED Handheld Sterilizer
- Model: X5
- Input: 5V = 1A
- UVC LED Beads: 20 pieces
- Dimension: 257×42×40mm
- Net Weight: 210g
- Wavelength: 260-280nm
- Power Supply Interface: Micro USB
- Discharge Time: 50 minutes
- Battery Parameters: Nominal Voltage: 3.6V
Limited Charging Voltage: 4.2V
Nominal Capacity: 2500mAh
Power: 9Wh
Standard: GB/T 18287-2013
- UVC LED Lifespan: Up to 10,000 hours
- Working Temperature: 0~40°C
Storage Temperature: -20~55°C

PACKING LIST

- 1 Wand *1
- 2 USB Cable *1
- 3 User Manual *1
- 4 Protective Goggles *1
- 5 Sterilization Test Report *1
- 6 Portable Storage Bag *1

WARM TIPS

- Please wear the protective goggles before using.
- Use the compliance adaptor for power supply, otherwise the product will get damaged.
- Fully charge the wand before using.
- Keep operation away from strong magnetic field objects.
- Remove the musty smell of towels. It will be more obvious when you sterilize for few times more according to the concentration of the odor.
- Study the manual carefully and thoroughly, keep it properly.
- In order to improve user experience, there will be changes in product features without prior written notice, please refer to actual contents in the package.

- CHILDREN PROHIBITED
- NO TRAMPLING
- DO NOT EXPOSE TO EYES & SKIN
- NO WASHING & SOAKING

NAME AND CONCENTRATION OF HARMFUL SUBSTANCE OR ELEMENTS

Part Names	Harmful substance or elements						
	Pb	Hg	Cd	Cr(VL)	PBDE	PBB	EFUP
Shell	0	0	0	0	0	0	10
PCBA	x	0	0	0	0	0	10
Battery	0	0	0	0	0	0	5
USB Cable	x	0	0	0	0	0	10

0: It means that the concentration of the toxic and harmful substance in all homogeneous materials of the component is compliance with the limitation stipulated in GB/26572-2011.

X: The concentration of the toxic and hazardous substances in certain homogeneous material of the component exceeds the limitation specified in GB/26572-2011.

Note: Components marked "X" stands for no alternative technologies or components available at this stage.

The EFUP refers to the safety lifespan of using the product without hazardous material leakage under the conditions specified in the manual.

- For the battery : 5 years EFUP under normal use conditions
- For the product : 10 years EFUP under normal use conditions

SEVEN
HEALTHCARE

Importato da:
Ingram Micro S.r.l.
Società a Socio Unico
V.le delle Industrie, 14/B
20090 Settala (MI) - Italy
infoprod.italia@ingrammicro.com

Imported by:

Ingram Micro Inc.
3351 Michelson Drive, Suite 100
Irvine, CA 92612-0697, USA

Ingram Micro NZ Ltd
78 Apollo Drive, Albany
Auckland 0642, New Zealand

Ingram Micro Pty Ltd
61 Dunning Ave, Rosebery
NSW 2018, Australia

Ingram Micro, LP Canada
55 Standish Court
Mississauga, ON, L5R 4A1, Canada

Europe:
Ingram Micro Pan Europe GmbH
Heisenbergweg 3
D-85609 Dornach / Munich,
Germany

Ingram Micro Mexico, S.A. de C.V.
Calle de José María 3, El Parque, 53398
Naucalpan de Juárez, CDMX, Mexico

59S[®]
The Pioneer of LED Sterilization

<https://www.59s.com>