


LINDY PRODUCT SPECIFICATION (1 OF 1)

Length	Polybag Size	Label Type	Product Number
0.3m	FP1	LSS	47240
0.5m	FP1	LSS	47241
1m	FP2	LSS	47242
1.5m	FP2	LSS	47243
2m	FP2	LSS	47244
3m	FP3	LSM	47245
5m	FP3	LSM	47246
7.5m	FP3	LSM	47247
10m	FP4	LSM	47248


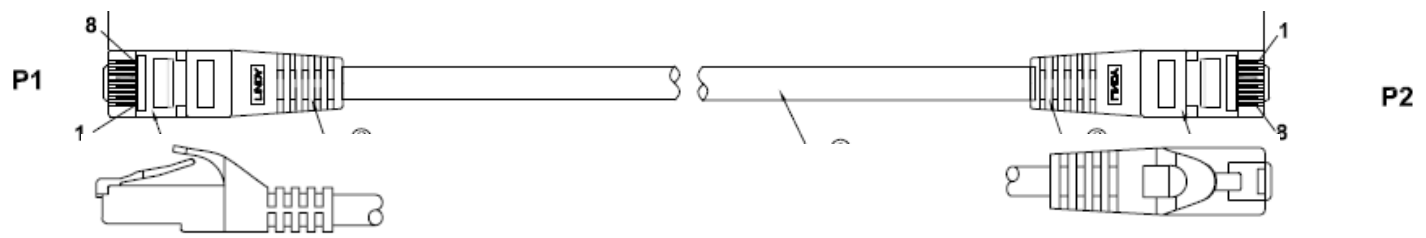


Cable printing can be one of the below depending on main cable supplier:

Cable Printing: E310848 U/UTP4P 24AWG CMX CAT6 www.LINDY.com

Cable Printing: CAT.6 F/UTP 250MHz RoHS & REACH --- Lindy.com

- NOTE:**
- 100% OPEN SHORT, MISS WIRE TEST
 - Printing:
CAT.6 F/UTP CCA 250MHz RoHS & REACH ---Lindy.com
 - Fluke Test: pass Fluke test (Length: $L \leq 10m$)
TEST LIMIT: ISO 11801 Channel Class E
 - Working Temperature: $-10^{\circ}C \sim +60^{\circ}C$
 - Rohs 10 AND REACH COMPLIANT
 - PACKING: 1PCS/LINDY BAG+LABEL

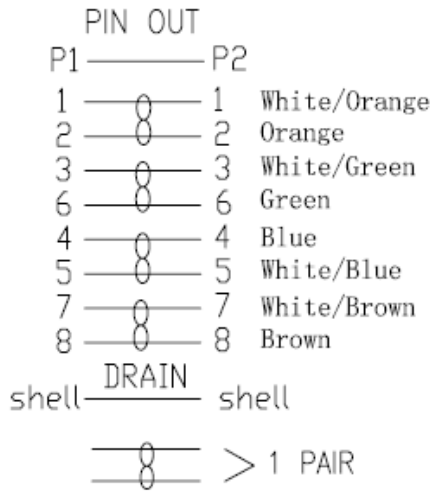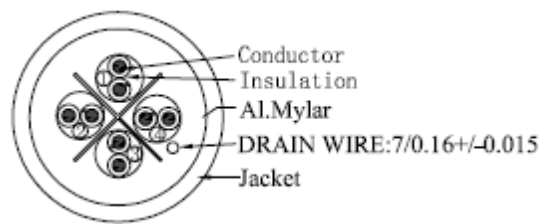

Product Name: Cat.6 F/UTP Patch Cable

- Connector A & B: RJ45 Plug Shielded Snagless, Pins 3 μ ” gold plated,
- Cable Type: Category 6 F/UTP, 26 AWG (7/0.16 CCA), 4 Pairs, 8 Core, Stranded, OD: 6.0mm, ANSI/TIA 568C.2, Jacket: PVC
- Colour: grey (Colour code: cool grey 1C)
- RoHS10 & REACH, California Proposition 65 compliant

Packaging: LINDY Polybag (sizes above) and barcode label

Alterations	Issue	Date	BY	GB	DE
Moulding change	1	27.11.14	ML		ML
Supplier Change / Printing & Packaging updated	2	18.10.18	ML	CS	
Packaging update 10m / Printing update	3	20.03.19	ML	CS	
Packaging update 10m	4	23.05.19	ML	MA	

Drawn By: ML, 31.10.2014

All connectors viewed from front

Tolerances:
Overall Length 0% +10%
Conductor +/- 0.01 mm per core

© Lindy group. All rights reserved. lindy.com

