LINDY PRODUCT SPECIFICATION (1 OF 1)

Length	Polybag Size	Label Type	Product Number
0.3m	FP1	LSS	48340
0.5m	FP1	LSS	48341
1m	FP2	LSS	48342
2m	FP2	LSS	48343
3m	FP3	LSM	48344
5m	FP3	LSM	48345
7.5m	FP3	LSM	48346
10m	FP4	LSM	48347
15m	FP4	LSM	48348
20m	FP4	LSM	48349
30m	FP4	LSM	48350

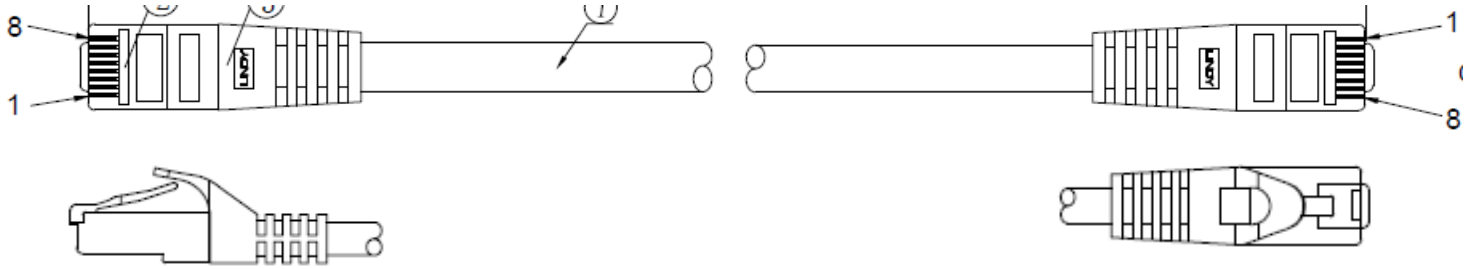

Cable printing can be one of the below depending on main cable supplier:

Cable Printing: (UL) E258106 CM STYLE 60℃ LINDY System Cable F/UTP CAT 5E 4 Pairs 26AWG Stranded ISO 11801 100MHz – RoHS – Lindy.com

Cable Printing: CAT.5e F/UTP 100MHz CM (UL) E330080 26AWG x 4 pairs RoHS & REACH --- Lindy.com

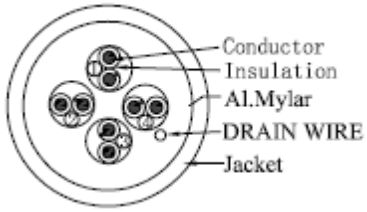

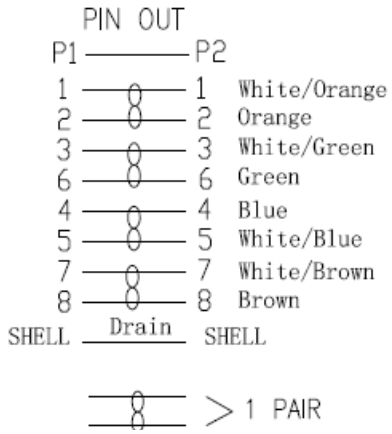

NOTE:
1. 100%OPEN SHORT, MISS WIRE TEST
2. Printing:
CAT. 5e F/UTP 100MHz UL E330080 RoHS & REACH ——L indy. com
3. Working Temperature: −10° C~+60° C
4. Rohs 10 AND REACH COMPLIANT

Product Name: Cat.5e F/UTP Patch Cable

- Connector A & B: RJ45 Plug Shielded Snagless, Pins 3µ" gold plated
- Cable Type: Category 5e F/UTP, 26 AWG（7/0.16BC), 4 Pairs, 8 Core, Stranded, AL-Foil), OD: 5.0mm, ANSI/TIA 568C.2, Jacket: PVC
- Colour: grey (Colour code: cool grey 1C)
- RoHS10 & REACH, California Proposition 65 compliant

Packaging: LINDY Polybag (sizes above) with label as above

Alterations	Issue	Date	BY	GB	DE
Packaging updated & Printing text, CP65 added	1	23.01.19	ML	RP	
Packaging update 10m	2	20.03.19	ML	CS	
Packaging update 10m	3	24.05.19	ML	MA	
Cable printing update	4	07.08.19	ML	CS	

Drawn By: ML, 10.08.2017

All connectors viewed from front

Tolerances:
Overall Length 0% +10%
Conductor +/- 0.01mm per core

© Lindy group. All rights reserved. **lindy.com**

LINDY
CONNECTION PERFECTION