


LINDY PRODUCT SPECIFICATION (1 OF 1)

Length	Polybag Size	Label Type	Product Number
0.3m	FP2	LSS	47130
0.5m	FP2	LSS	47131
1m	FP2	LSS	47132
1.5m	FP2	LSS	47133
2m	FP2	LSS	47134
3m	FP3	LSM	47135
5m	FP3	LSM	47136
7.5m	FP3	LSM	47137
10m	FP4	LSM	47138
15m	FP4	LSM	47139
20m	FP4	LSM	47140
30m	FP4	LSM	47141
50m	FP4	LSM	47142
70m	P6	LSM	47143
100m	P6	LSM	47144

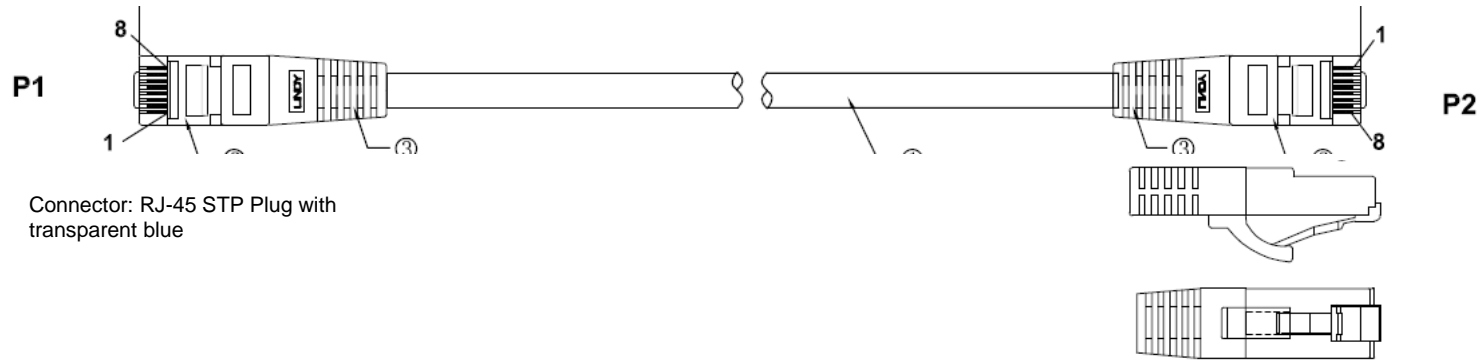

Cable Printing: CAT.6A S/FTP 500MHz LSZH RoHS & REACH --- Lindy.com

NOTE:




1. Electrical test:

- (1). 100% OPEN SHORT, MISS WIRE TEST;
- (2). Insulation resistance: DC 300V 10MΩ min;
- (3). Contact resistance: 15Ω max;

3. Working temperature: -10° C ~ +60° C

SEC A

PIN OUT

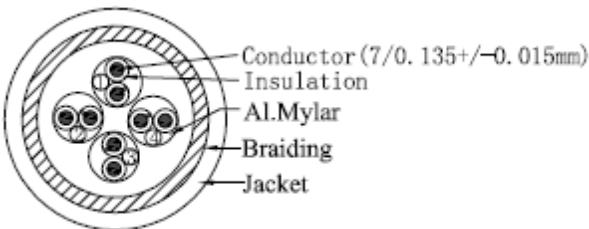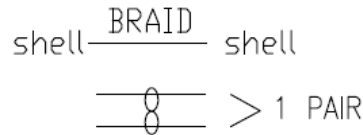

Product Name: Cat.6A S/FTP LSZH Cable

- Connector A & B: RJ45 Plug Shielded Snagless, Pins 3μ" gold plated
- Cable Type: Category 6A S/FTP PiMF, 27 AWG (7/0.135cu), 4 Pairs, 8 Core, Stranded, Braid (AL), OD: 6.0mm, ANSI/TIA 568C.2, Jacket: LSZH
- Colour: grey (Colour code: cool grey 1C)
- RoHS10 & REACH, California Proposition 65 compliant

Packaging: LINDY Polybag (sizes above) and barcode label

Alterations	Issue	Date	BY	GB	DE
Printing update / Packaging update 10m	7	23..05.19	ML	MA	
Updated FP1 packaging to FP2	8	11.10.21	MA	MA	
Added 50m,70m,100m Lengths	9	30/11/20		JW	YH

Drawn By: ML, 23.01.2014

All connectors viewed from front

Tolerances:
 Overall Length 0% +10%
 Conductor +/- 0.01 mm per core

© Lindy group. All rights reserved. lindy.com

