


# LINDY PRODUCT SPECIFICATION (1 OF 2)

Length	Polybag Size	Label Type	Product Number
0.15m	FP1	LBS	36914
0.5m	FP1	LBS	36915
1m	FP1	LBS	36916
1.5m	FP2	LBS	36917

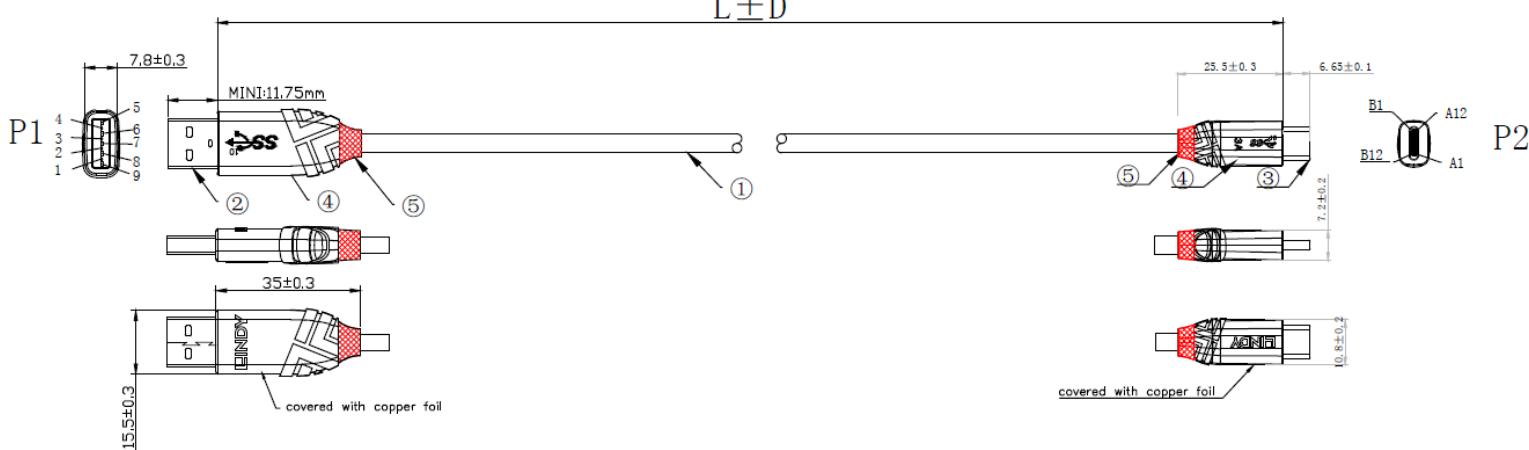


**LINDY** Black Line USB 3.2 Cable lindy.com

E330337

AWM STYLE 2725 80°C 30V VW-1 Power and Data only

A B Function

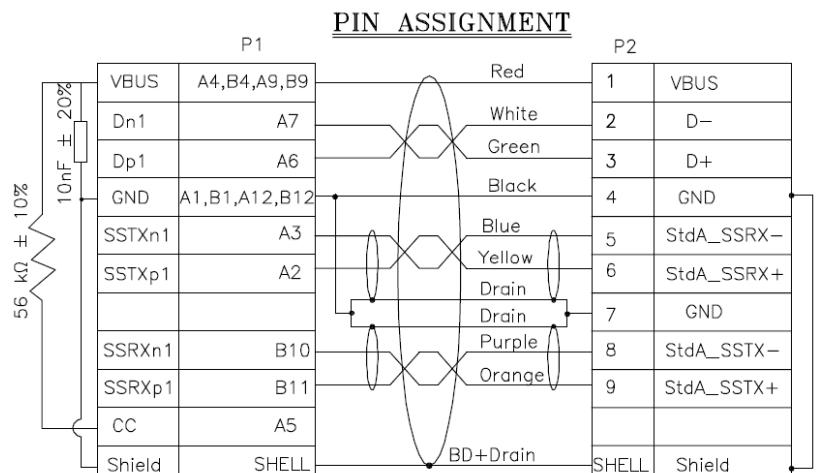

**Product Name:** USB 3.2 Type A to C Cable, Black Line

- Connector P1: USB 3.2 Type C Male (gold plated contacts, nickel plated shell)
- Connector P2: USB 3.2 Type A Male (gold plated contacts, nickel plated shell)
- Copper foil shielding in connector head shell
- Cable: [30AWG(7/0.1TC)+D(7/0.1TC)+AL/MY]\*2P+30AWG(7/0.1TC)\*1P+24AWG(7/0.2TC)\*2C+AL/MY+B(16/3/0.1TC), Black PVC Jacket, OD: 4.5mm
- Colour: PVC Black, red grommet (2035C)

**Product Compliance:**

CE, UKCA, RoHS, REACH (Art. 33, Anx 17), POP, CP65, UL (raw cable)

**Alterations**

Supplier change, Updated formatting, drawing, cable type information, E-number, BOM, connector drawing on page 2, added copper foil shielding

Issue Date BY GB DE

Updated drawing, cable, BOM, Compliance

7 29.06.21 JA CS JA

Drawn By: ML, 14.05.2018

© Lindy group. All rights reserved. [lindy.com](http://lindy.com)

All connectors viewed from front

**Tolerances:**

Overall Length 0% +10%

Conductor +/- 0.01mm per core


**LINDY**  
CONNECTION PERFECTION

# LINDY PRODUCT SPECIFICATION (2 OF 2)


Product  
Number

## Additional Imagery

### USB 3.2 Type A Male

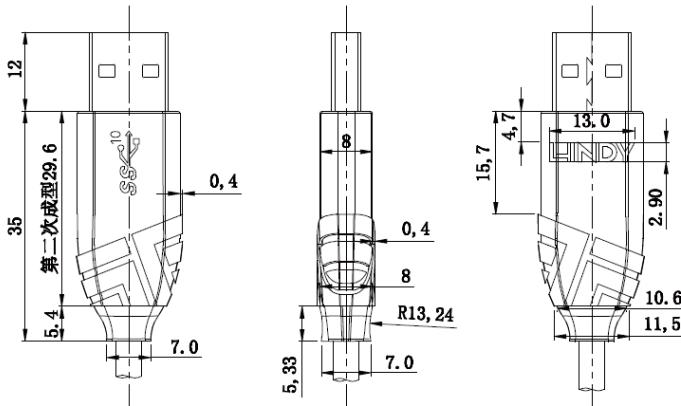

### USB 3.2 Type C Male, 3A

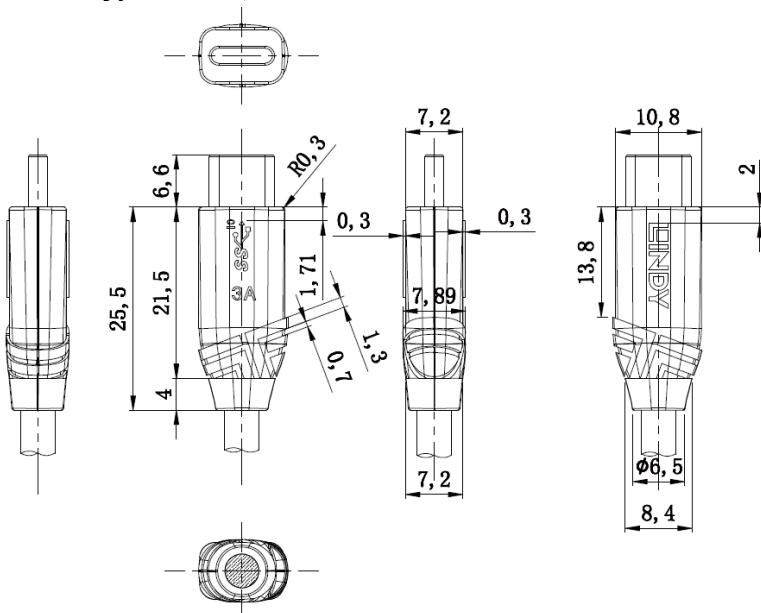

## Additional Description

5	MOLDING	SR PVC RED( Pantone NO:2035C)	12	g
4	MOLDING	45P PVC BLACK	10	g
3	CONNECTOR	TYPE C(M), SOLDER TYPE, CONTACT GOLD PLATED, SHELL NI PLATED	1	PCS
2	CONNECTOR	USB3.2 AM SOLDER, CONTACT GOLDPLATED, SHELL NI PLATED	1	PCS
1	CABLE	[30AWG(7/0.1±0.008TC)+D(7/0.1±0.008TC)+AL/WT]*2P+30AWG(7/0.1±0.008TC)*1P+24AWG(7/0.2±0.008TC)*2C+AL/WT+B(16/3/0.1TC). BLACK PVC JACKET OD:4.5±0.2MM	X	M
NO		DESCRIPTION	QTY	UNIT

## NOTES:

1. OPEN/SHORT/INTERMITTENCE 100% TEST.
2. DIELECTRIC STRENGTH:200 VOLTS AC /0.01S.
3. INSULATION RESISTANCE:300V DC/0.01S,5MΩ MIN.
4. CONDUCTIVE RESISTANCE:5Ω MAX.