


LINDY PRODUCT SPECIFICATION (1 OF 1)

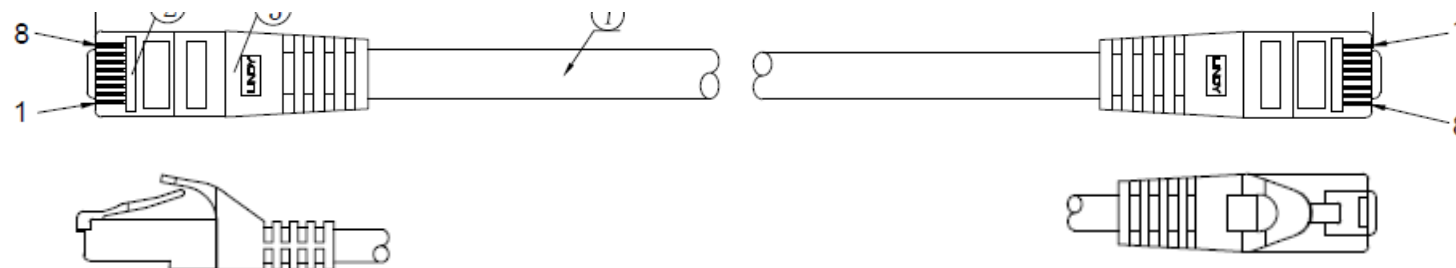


Length	Polybag Size	Label Type	Product Number
0.5m	FP1	LSS	48390
1m	FP2	LSS	48391
2m	FP2	LSS	48392
3m	FP3	LSM	48393
5m	FP3	LSM	48394
10m	FP4	LSM	48395

Cable printing can be one of the below depending on main cable supplier:

Cable Printing: F/UTP CAT 5E 4 Pairs 26AWG Stranded ISO 11801 100MHz – RoHS – Lindy.com

Cable Printing: CAT.5e F/UTP 100MHz RoHS & REACH --- Lindy.com

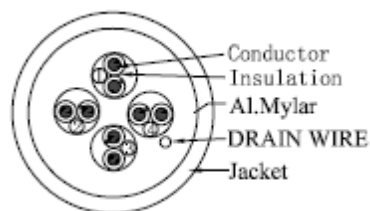

PIN OUT	
P1	P2
1	1 White/Orange
2	2 Orange
3	3 White/Green
6	6 Green
4	4 Blue
5	5 White/Blue
7	7 White/Brown
8	8 Brown
SHELL	Drain SHELL
> 1 PAIR	

NOTE:

1. 100% OPEN SHORT, MISS WIRE TEST

2. Printing:

CAT. 5e F/UTP 100MHz RoHS & REACH —Lindy.com

3. Working Temperature: -10° C ~ +60° C

4. Rohs 10 AND REACH COMPLIANT

Product Name: Cat.5e F/UTP Patch Cable (CCA)

- Connector A & B: RJ45 Plug Shielded Snagless, Pins 3μ" gold plated
- Cable Type: Category 5e F/UTP, 26 AWG (7/0.16 CCA), 4 Pairs, 8 Core, Stranded, AL-Foil, OD: 5.2mm, ANSI/TIA 568C.2, Jacket: PVC
- Colour: grey (Colour code: cool grey 1C)
- RoHS10 & REACH, California Proposition 65 compliant

Packaging: LINDY Polybag (sizes above) and label as above

Alterations	Issue	Date	BY	GB	DE
Packaging changed to P3 for 3m length	1	17.08.17	ML		ML
Packaging updated & Printing text, CP65 added	2	23.01.19	ML	RP	
Packaging update 10m	3	20.03.19	ML	CS	
Packaging update 10m	4	24.05.19	ML	MA	

Drawn By: ML, 10.08.2017

All connectors viewed from front

Tolerances:
Overall Length 0% +10%
Conductor +/- 0.01mm per core

© Lindy group. All rights reserved. lindy.com

LINDY
CONNECTION PERFECTION