



# LINDY PRODUCT SPECIFICATION (1 OF 2)

Length	Polybag Size	Label Type	Product Number
10m	FP4	LSM	41071
15m	FP4	LSM	41072

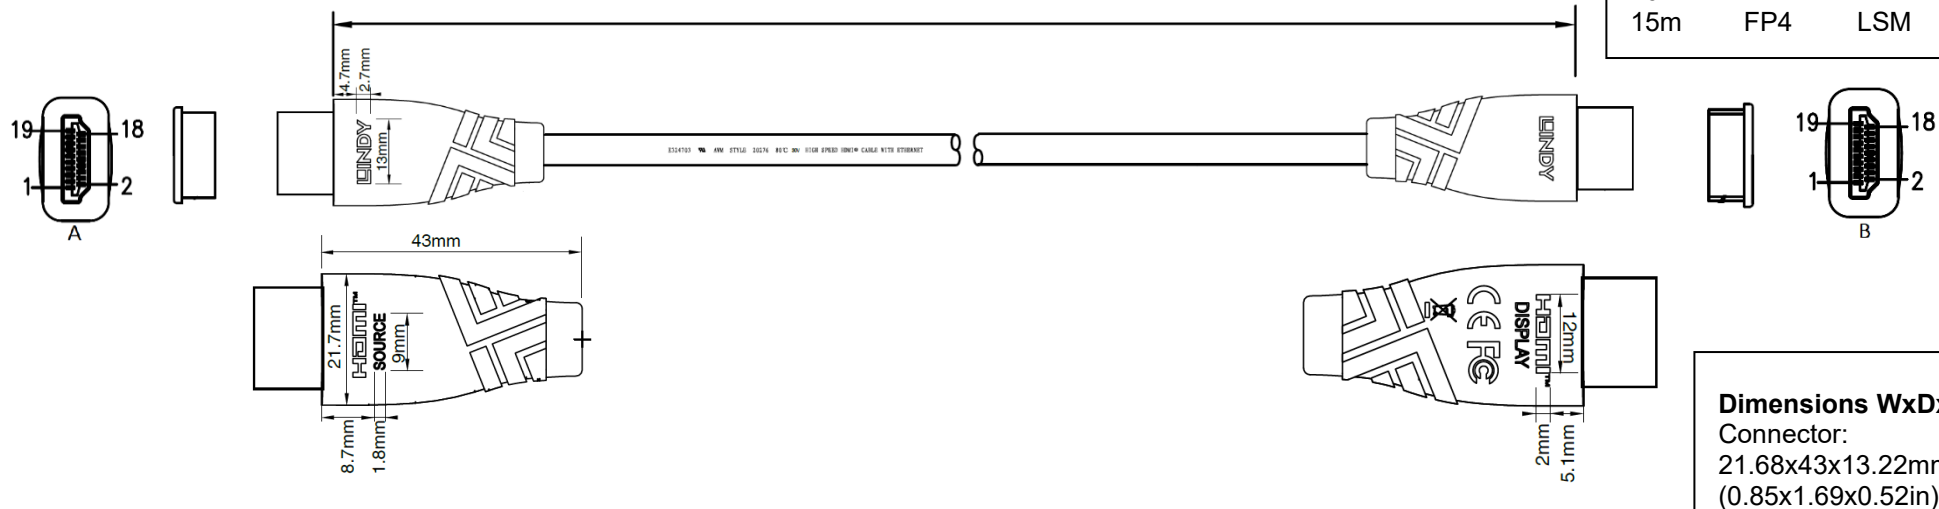

**Dimensions WxDxH approx.**  
 Connector:  
 21.68x43x13.22mm  
 (0.85x1.69x0.52in)

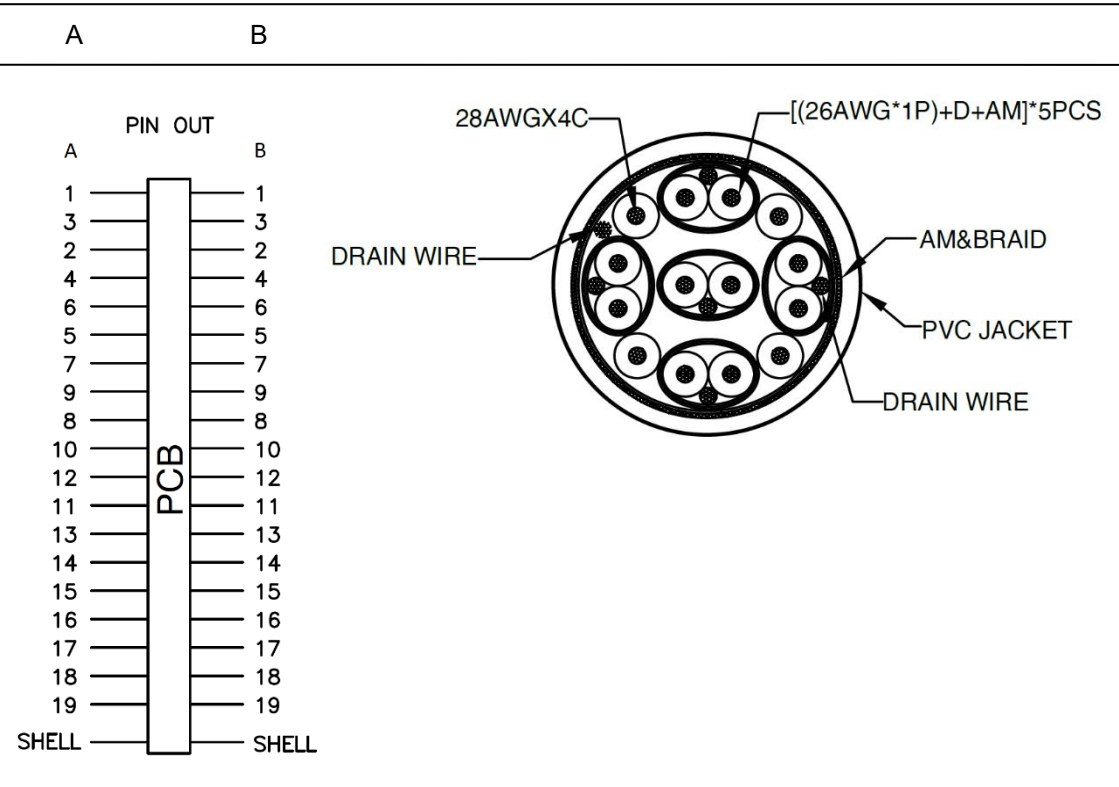

**Product Name:** Active HDMI 2.0 18G Cable

- HDMI Type A Male to HDMI Type A Male, Gold plated connectors
- Supports resolutions up to 4096x2160@60Hz 4:4:4 8bit
- Compatible with HDMI 2.0 specification and data rates up to 18Gbit/s
- Colour: Black
- Cable Type:  
 (7/0.16BC\*1P+7/0.12BC+AM)\*5PCS+7/0.12BC\*4C+AM+7/0.12BC+128/0.12 ALMG+PVC 8.6mm)
- CE/FCC, UL, RoHS and REACH compliant

Packaging: Polybag as above with LSM label

Alterations	Issue	Date	BY	GB	DE
	0	27/02/18	RP	AI	
Packaging amended	1	01.07.19	RP		JS

Drawn By: RP, 27/02/2018

All connectors viewed from front

**Tolerances:**  
 Overall Length 0% +10%  
 Conductor +/- 0.01mm per core

© Lindy group. All rights reserved. [lindy.com](http://lindy.com)

# LINDY PRODUCT SPECIFICATION (2 OF 2)

Product  
Number

## Additional Imagery

## Additional Description

41071  
41072

### Connectors

- Housing Material: ABS
- Connector Plating: 24K Gold Flash
- Pin Construction: Phosphor Bronze
- Pin Plating: 24K Gold 3um

### Cable Construction

- Standard: HDMI 2.0
- Colour: Black
- Type: Round
- Jacket Diameter: 8.6mm (0.34in)
- Jacket Material: PVC
- Conductor Material: Bare Copper
- Conductor Gauge: 28AWG
- Shielding: Aluminium Foil Mylar, 100% / Aluminium Alloy Braiding, 70%

### Specifications

- Supported Bandwidth: 18Gbps
- Maximum Resolution: 4096x2160@60Hz 4:4:4 8bit
- Nominal Attenuation: 300KHz~825MHz 5dB, 2.475GHz~4.125GHz 12dB~20dB
- Minimum Bend Radius: 100mm (3.94in)
- Operating Temperature: -20°C - 80°C (-4°F - 176°F)
- Storage Temperature: -10°C - 60°C (14°F - 140°F)