


LINDY PRODUCT SPECIFICATION (1 OF 1)

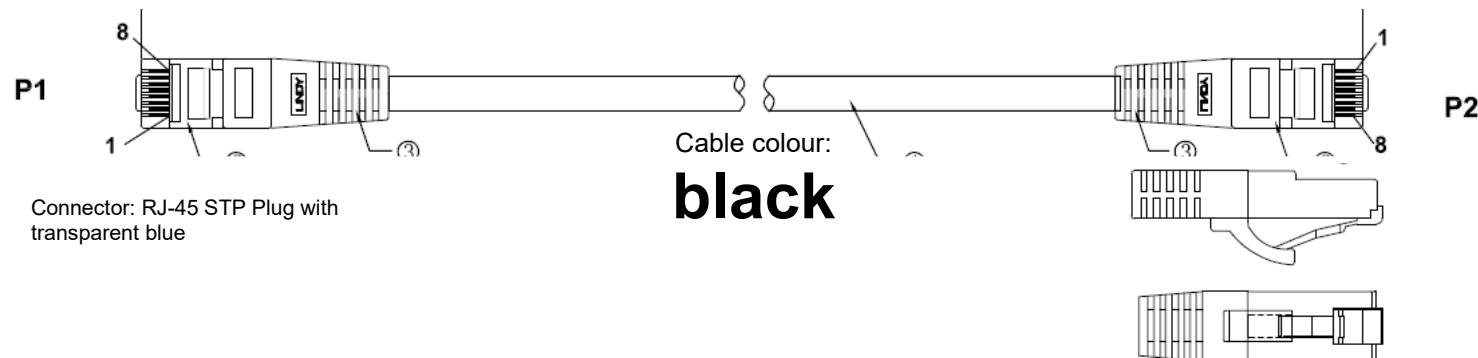

Length	Polybag Size	Label Type	Product Number
0.3m	FP2	LSS	47175
0.5m	FP2	LSS	47176
1m	FP2	LSS	47177
1.5m	FP2	LSS	47178
2m	FP2	LSS	47179
3m	FP3	LSM	47180
5m	FP3	LSM	47181
7.5m	FP3	LSM	47182
10m	FP4	LSM	47183
15m	FP4	LSM	47184
20m	FP4	LSM	47185
30m	FP4	LSM	47186

Cable printing can be one of the below depending on main cable supplier:

Cable Printing: CAT 6A S/FTP PIMF PATCH CABLE 500MHz 4PAIRS 100ohm UL E321484 AVM 2835 RoHS 2.0 COMPLIANT LSZH Halogen Free --- www.LINDY.com


Cable Printing: CAT.6A S/FTP 500MHz LSZH RoHS & REACH --- Lindy.com

NOTE:


1. Electrical test:

- (1). 100% OPEN SHORT, MISS WIRE TEST;
- (2). Insulation resistance: DC 300V 10MΩ min;
- (3). Contactor resistance: 15Ω max;

3. Working temperature: -10° C ~ +60° C

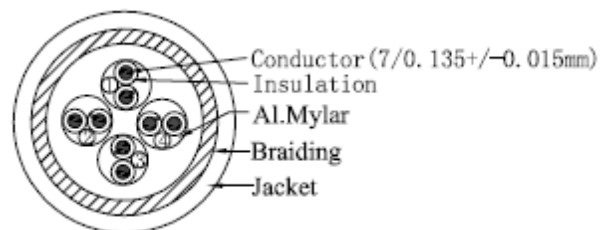

SEC A

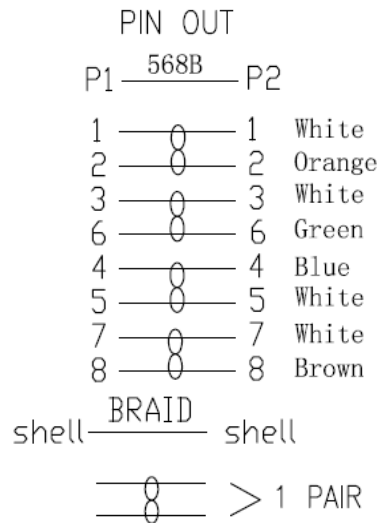

Product Name: Cat.6A S/FTP LSZH Cable

- Connector A & B: RJ45 Plug Shielded Snagless, Pins 3μ" gold plated
- Cable Type: Category 6A S/FTP PiMF, 27 AWG (7/0.135cu), 4 Pairs, 8 Core, Stranded, Braid (AL), OD: 6.0mm, ANSI/TIA 568C.2, Jacket: LSZH
- Colour: black
- RoHS10 & REACH, California Proposition 65 compliant

Packaging: LINDY Polybag (sizes above) and barcode label

Alterations	Issue	Date	BY	GB	DE
Printing update / Packaging update 10m	4	23.05.19	ML	MA	
Updated FP1 packaging to FP2	5	11.10.21	MA	MA	

Drawn By: ML, 28.01.2014

All connectors viewed from front

Tolerances:
Overall Length 0% +10%
Conductor +/- 0.01mm per core

© Lindy group. All rights reserved. lindy.com

LINDY
CONNECTION PERFECTION