



Entry level price within the fluorescent lamp range

Equipped with spring-balanced arm enabling a great ease of movement and extends the lifetime of the product

Switch placed on the lampshade for easy access


Double articulated arm enabling to adjust the lampshade always in parallel to the working surface

High stability of the lamp thanks to its 3 kg base  
Also supplied with bracket to be clamped on the desk

**LIGHTING FEATURES**

**Lux curve**

(40 cm from working surface)

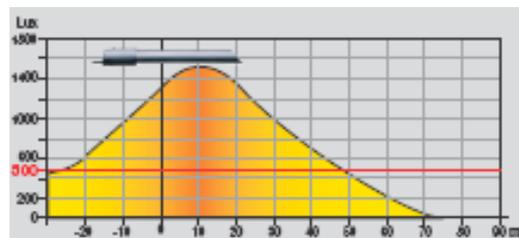

- Luminaire efficiency : 82 lm/W
- Colour temperature : 3000 ° Kelvin
- Colour rendering index (CRI) : 90

**TECHNICAL FEATURES**

- Fluorescent bulb 11 W G23
- Average lifetime of the bulb 10 000 h
- Ballast on wire
- Switch on the lampshade
- Double insulated 
- Wire length : 2,15 m



Directive                      Norm                      Origin                      Guarantee




3 years

EN NF 60-598

**MATERIAL**

ABS and metal with epoxy paint finish, mylar reflector

Aluminium bracket : 6,7 cm spread

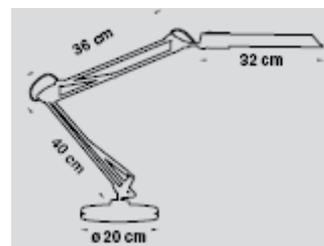

**LOGISTIC FEATURES**

Unilux product code	color	Customs Tariff number	EAN Code	Packaging size (cm)			Net weight (kg)	Gross weight (kg)
				Length	Width	Depth		
211EU24	black	94054035	3595560009398	38,5	21	8	4,33	4,49
211EU28	white	94054035	3595560010240	38,5	21	8	4,33	4,49