

Technical Specifications

STEEL SLING

References:

1002897 – length 1.0 m
1003178 – length 2.0 m
1003179 – length 3.0 m

Features:

Wire rope : Ø6.3mm galvanised steel
Protection sheath: Transparent plastic
Thimble: Galvanised steel
Talurit sleeve: Aluminium


Dimensions

Overall dimensions
Length: 1 meter
Width: 75mm
Thickness: 40mm
Maximum dimensions of structure to be hooked
Square structure: 250x250mm
Round structure: Ø 300mm

Weight:
1m 0.518 kg/2m 0.550 kg / 3m 0.585 kg

Tests :
Breaking strength: > 10 KN
Temperature: -30°C to +60°C

EN 795: ANCHOR DEVICES

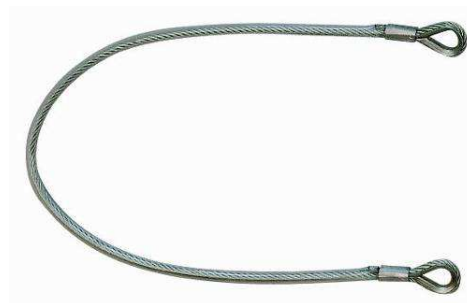

LAW of 19 MARCH 93

PPE are products classified in category III, mortal risks, and as such they have to be the object of a periodic inspection for less than twelve months at the time of its use by the qualified person.

For more information, please contact our technical team at 02 48 52 40 42 or by e-mail techniserv.hsp@honeywell.com

HONEYWELL FALL PROTECTION FRANCE SAS

35-37 rue de la Bidauderie

F - 18100 Vierzon - France

Tel : +33 2 48 52 40 40

Fax : +33 2 48 71 04 97

Web site : www.honeywellsafety.com