



Your Efficient 3-in-1 Mono Laser Printer

Easy to set up and connect with fast
flawless printing

DCP-L2660DW



PRINT



SCAN



COPY



WIRELESS

www.brother.eu

Your Efficient 3-in-1 Mono Laser Printer

Work smarter from anywhere at home or in the office with the easily connected Brother DCP-L2660DW. Hosting a range of efficiency-boosting features, this 3-in-1 mono laser printer saves you time with fast flawless printing and quick scan speeds, automatic 2-sided print, a generous paper tray capacity and large automatic document feeder.

Get set up with ease and download the Brother Mobile Connect App, enabling you to print and scan from virtually anywhere.

DCP-L2660DW



Key features:

- Print up to 34 pages per minute
- 2-Sided print, up to 16 sides per minute
- Scan up to 22.5 images per minute³
- 6.8cm Colour touchscreen
- Fast ethernet, 5GHz WiFi and USB
- 256MB Internal memory
- 50 Sheet Automatic Document Feeder (ADF)¹¹
- 250 Sheet paper input tray¹¹
- Comes with 1,200 page yield toner, 3,000 maximum yield available⁷

Work smarter

The DCP-L2660DW is designed to increase efficiency, with fast print speeds helping you to work smarter. The Automatic Document Feeder and 2-sided print feature save you time, enabling you to get on with other tasks. Scan your documents in colour or mono and send directly to your desktop or mobile device.

Effortless

Make your day easier and your printing effortless, with simple set up and fast ethernet, 5GHz WiFi or USB connection. This efficient DCP-L2660DW is a breeze to operate using the easy to navigate menu on the 6.8cm colour touchscreen. Benefit from the ability to create custom shortcuts on the touchscreen for your most used functions.

The perfect partner

High quality print technology ensures that your output is flawless and professional every time. The expertly designed DCP-L2660DW has a high capacity paper input and output tray allowing you to print for longer, while the compact and quiet form enables you to work without interruption in smaller workspaces.

Print longer

The DCP-L2660DW keeps your printing costs down using a separate drum and toner unit, and the generous 1,200 pages⁷ inbox toner supporting your higher print volume needs. Toner is easy to change and high yield toner is available, printing up to 3,000 pages⁷, reducing your cost per page and frequency to replace.

Secure by design

To keep pace with the ever-evolving legislation on privacy and data security, our devices offer the latest industry-standard security features to securely protect your data. Our security experts continuously research new enhancements to products, solutions and services to proactively ensure all our products are 'secure by design'.

The DCP-L2660DW provides a range of robust features. It uses triple-layer security at a device, network and document level. This offers added peace of mind and guarantees that the integrity of your data is maintained at every step.

Print from anywhere

With Brother Mobile Connect, you can fully operate your Brother printer from your fingertips. Print and scan documents on the move and order genuine Brother supplies straight to your door. You can also personalise your frequently used features and unlock a revolutionary way of printing from your mobile device.


Download the app on your mobile device to get started.



The automated toner subscription for your printer

Whether you print a little or a lot, we have a flexible printing subscription plan to suit everyone. You can sign up and enjoy toner supplies delivered automatically with free postage direct to your doorstep.

Benefit from ongoing printer warranty cover, free toner recycling and first-class customer support. Subscribe to a better way to print.

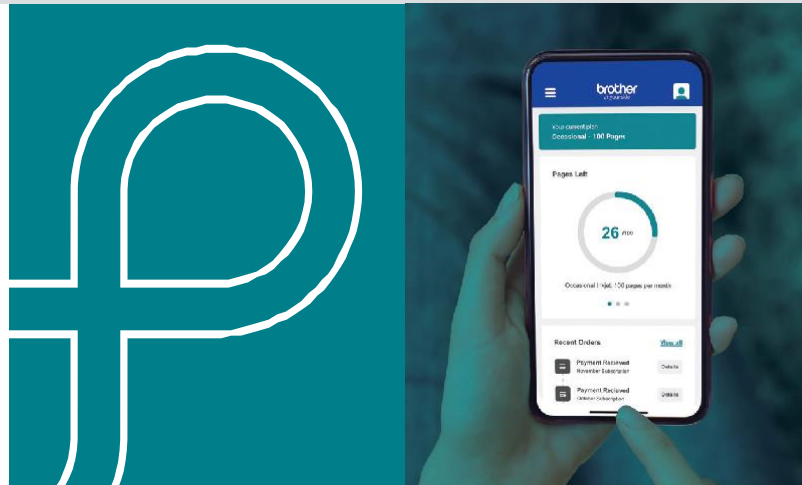

TO FIND OUT MORE

Download the Brother Mobile Connect app
or visit the website: brother.co.uk/ecopro



General

Technology

Electrophotographic
Laser

Memory

265MB

Control panel

6.8cm Colour
Touchscreen
LCD

Local Interface

Hi-Speed USB 2.0

Wired Network

Fast Ethernet

Wireless Network

2.4GHz and 5GHz
Support

Carton Contents

Device, Inbox Toner,
Drum, Power Supply
Cord, Quick
Set-Up Guide, Warranty
Card

Print

Print Speed (A4)

1 Sided: 34ppm Mono
2 Sided: 16
sides per minute
Mono

FPOT

(First Print Out Time)

Up to 8.5 Seconds Mono

Quiet Mode

A mode to reduce the
printing noise

Resolution

Up to 1200 x 1200dpi

Print Languages

PCL6, BR-Script3,
PDF Version 1.7

Embedded Fonts (PCL)

73 scalable fonts,
12 bitmap fonts

Embedded Barcodes (PCL)

16 bar codes*

*Code39, Interleaved 2 of 5,
FIM (US-PostNet), Post Net
(US-PostNet), EAN-8, EAN-13,
UPC-A, UPC-E, Codabar,
ISBN EAN), ISBN UPC-E),
Code128 (set A, set B, set
C), EAN128 (set A, set B, set
C), Code93, GS1Databar,
MSI

Embedded Fonts (Postscript)

66 scalable fonts

Printer Functions

N-up Printing

Reduce up to 25 pages
into a single page

Poster Printing

Enlarge a single page into
a poster using 2x2, 3x3,
4x4 or 5x5 pages

Toner Save Mode

Use the Toner Save Mode
to reduce toner
consumption without
affecting print speed

Watermark Printing

Watermark your documents
with predefined text,
custom logo or custom
messages

ID Printing

Add identification to your
printed documents (date and
time, short custom message
or
PC username)

Booklet Printing

Print documents in A5
booklet format using
automatic or manual 2-sided
print

Print Profiles

Store your favourite driver
settings as profiles to
easily recall them

Manual 2-Sided Print

Manual 2-sided printing
(recommended for media
not supported by automatic
2-sided print)

Reverse Print

Rotate the content of a
printed document by 180°

Print Complete Notice

A printing notification can
be set to go to your
computer (Network only)

Printer Driver

Windows

Windows 11 (32 and 64 bit editions) and more

macOS

Printing via macOS requires the use of AirPrint. Mac drivers are not provided.

Linux

CUPS, LPD/LPRng (x86/x64 environment)

ChromeOS

Supports native ChromeOS printing

PCL Driver

Universal Printer Driver (Windows) (PCL5e/BRScript)

PostScript Universal Printer Driver

Driver for Windows that enables you to print to any network or locally connected Brother printer

Visit support.brother.com for the full list of supported OS and to download the latest drivers and software.

Paper Handling¹¹

Paper Input Standard Tray

250 Sheets

Manual Feed Slot

1 Sheet

Automatic Document Feeder (ADF)

50 Sheets

Paper Output

120 Sheets A4

Envelope Printing

Yes from manual feed slot

Media Sizes

Standard Tray

A4, Letter, B5(JIS), B5(ISO), A5, A5(Long Edge), B6(JIS), A6, Executive, A4 Short,

Manual Feed Slot

Width 76.2 to 215.9 mm, Length 127 to 355.6 mm Envelope; COM-10, DL, C5, Monarch

ADF

Width: 105 to 216 mm Length: 147 to 356 mm

Scanner Glass

Up to A4/LTR

Auto 2-Sided

A4

Media Type and Weights

Standard Tray

Plain Paper, Thin Paper, Recycled Paper, Thick Paper 60-

Manual Feed Slot

Plain Paper, Thin Paper, Thick Paper, Thicker Paper, Recycled Paper, Bond, Label, Envelope, Env. Thin, Env. Thick 60-230gsm

ADF

Plain Paper, Recycled Paper 60 to 105gsm

Auto 2-Sided

Plain Paper, Thin Paper, Recycled Paper 64-105gsm

Mobile and Web Connectivity

Brother Mobile Connect¹⁷ (Android)

Print from, scan to, preview copies and check the machine status from an Android device

Brother Mobile Connect¹⁷ (iPad / iPhone)

Print from, scan to, preview copies and check the machine status from an iPad / iPhone

Apple AirPrint¹⁷

Print from and scan to most common file types from any AirPrint enabled application

Brother Print Service Plugin¹⁷

Print from an Android devices without a dedicated App.

Mopria™¹⁷

Print most common file types from Mopria™ supported Android devices

Brother Apps¹⁸

Scan to Mobile, Scan to Searchable PDF, Fax forward to Cloud/E-mail, Scan to PowerPoint, Scan to Excel, Scan to Word, Easy scan to E-mail, Cloud Secure Print, Email

Web Connect¹⁸

Print from and scan to without using a PC on Box, Dropbox, Evernote, OneDrive, Google Drive™ OneNote, SharePoint online

Copy

Copy Speed (A4)

1-Sided: 34ppm Mono

Resolution

Up to 600 x 600dpi

FCOT

(First Copy Out Time)

Up to 10 Seconds Mono

Grey Scale

256 shades of grey
(8 bit for each
colour)

Copy Functions

Multi-Copying/Stack/Sort

Makes up to 99 copies of each page / Stacks or Sorts

Enlargement/Reduction Ratio

Reduce or Increase document sizes from 25% to 400% in 1% increments

2 in 1 ID Copying

Allows the user to copy both sides of an ID card to a single A4 sheet

N in 1 Copying

Allows the user to compress 2 or 4 pages on to a single A4 sheet

Scan

Scanner Type

CIS (Contact Image Sensor)

Colour and Mono Scanning

Yes

Scan Speed (A4)³

1-Sided: 22.5ipm Mono and 7.5ipm Colour

Scan Resolution from ADF

600 x 600dpi

Scan Resolution from Scanner Glass

1200 x 1200dpi

Interpolated Scan Resolution

Brother Scanner Utility enhances up to 19,200 x 19,200 dpi

Colour Depth

30 bit colour Processing (Input)
24 bit colour Processing

(Output)

Grey Scale

10 bit colour Processing (Input)
8 bit colour Processing (Output)

Scanner Functions

Supported File Formats

Including PDF (PDF/A, Secure PDF, Signed PDF, Searchable¹⁷) JPEG, TIFF

Standard Functions¹⁷

Scan to E-mail, OCR, Image, File

Network Scanning¹⁶

Scan to FTP, FTPS, HTTPS, Sharepoint (iPrint&Scan for Windows only)

Scan Features

Auto Deskew from ADF only (iPrint&Scan for Desktop)

Scan To Microsoft Office

Scan to Word (.docx), PowerPoint (.pptx), Excel (.xlsx) for Microsoft Office

Scan Profile¹⁵

Create up to 25 profiles for an easy way to store multiple scan settings (scan to FTP/ Sharepoint)

Document Separation

Create scanned files based on blank sheet separation or a specific number of single sided images or sheets of paper, even if more documents are set on the ADF

Scanner Drivers

Windows

TWAIN and WIA
Windows 11
(32 and 64 bit editions)

Visit support.brother.com for the full list of supported OS and to download the latest drivers and software.

macOS

Scanning via macOS requires the use of AirPrint. Mac drivers are not provided.

Linux

SANE (32 and 64 bit editions)

ChromeOS

Supports native ChromeOS scanning

Fleet Management Tools

BRAdmin^{16,17}

LAN/WAN management software

Embedded Web Server

Web based print management software embedded onto the device

Driver Deployment Wizard^{16,17}

Easily create print drivers for hassle free deployment over your network

Status Monitor¹⁶

Monitor the status of your machine from your computer

Software

Brother iPrint&Scan Desktop^{15,17}

Print from, scan to, preview copies and check the machine status from Windows or macOS PC

PaperPort SE 14^{16,17}

Document management and sharing program from KOFAX

Utilities

Provides setup guides, manual, FAQ, troubleshooting and contact to Brother customer service

Easy Setup

Simple access to drivers and software for the installation of your Brother machine from support.brother.com

Connectivity

Wired Network

Fast Ethernet
(10Base-T/100Base-TX)

Wireless Network

2.4GHz: IEEE 802.11 b/g/n (Infrastructure Mode)
IEEE 802.11 g/n (Wi-Fi Direct)
5GHz: IEEE 802.11 a/n (Infrastructure Mode)
IEEE 802.11 a/n (Wi-Fi Direct)

Wi-Fi Direct®

Print wirelessly without having to go through a wireless access point (both automatic and manual methods supported)

Wireless Setup Support

Wi-Fi Protected Setup (WPS))

Wireless Applications

Vertical Pairing

Mobile

Print or scan from your mobile device with Brother Mobile Connect, Airprint, Mopria

Local Interface

Hi-Speed USB 2.0

Security Features

Wired Network Security

SMTP-AUTH, SSL/TLS(SMTP, HTTP, IPP, FTP), SNMP v3, 802.1x (EAP-MD5, EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), OAuth(SMTP, POP3, IMAP4)

Wireless Network Security

WEP 64/128 bit, WPA-PSK(TKIP/AES), WPA2-PSK (TKIP/AES), WPA3-SAE (AES), WiFi Direct supports WPA2-PSK(AES) only.

SMTP-AUTH, SSL/TLS (SMTP,HTTP,IPP,FTP), SNMP v3, 802.1x (EAP-FAST, PEAP, EAP- TLS, EAP-TTLS), OAuth(SMTP, POP3, IMAP4)

IPv4

ARP, RARP, BOOTP, DHCP, APIPA(Auto IP), WINS/NetBIOS name resolution, DNS Resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, SMTP Client, IPP/ IPPS, FTP Client and Server, SNMPv1/v2c/v3, HTTP/HTTPS

server, TFTP client and server, ICMP, Web Services

(**IPv6**/ Scan), SNTP Client NDP, RA, DNS resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, IPP/IPPS, SMTP Client, FTP Client and Server, SNMPv1/v2c/v3, HTTP/HTTPS server, TFTP client and server, ICMPv6, Web Services (Print/Scan), SNTP Client

IP Filter

Restrict which network users can or cannot access the device over the network (IPv4 only)

E-mail Notifications

Automatically have the device send e-mail alerts when it requires attention, such as when the toner is low or needs replacing

E-mail Reports

Receive usage reports on a regular basis via e-mail

Automatic Intrusion Detection

All Brother Print devices are secure by design. Devices automatically recognise security attacks and take preventative measures, including rebooting where necessary, to ensure the device remains secure

Firmware Updates

In addition to allowing automatic update alerts to install the latest version the printer can be set to not receive older firmware versions to avoid downgrade by an unauthorised user

Cloud Secure Print

Enables password protected driverless print job release

Certificate Management

Use the default standard self-signed, create a custom self-signed certificate, certificate signing request (CSR), or external public certificate & private key for protected network communication

Digitally-signed Firmware

The firmware for Brother print and scan devices is digitally signed and secure

Port-based Network Access Control

(IEEE 802.1x)
Brother devices are in full compliance with this standard, to allow connection to an 802.1x EAP (Extensible Authentication Protocol) protected network

Restrict network protocols

The Protocol Control feature allows an administrator to restrict communication protocols (e.g. FTP, Telnet) as required

Supplies and Consumables	Inbox Toner ⁷ 1 x 1,200 pages (BK)	High Yield Toner ⁷ TN2510XL - 3,000 pages	Drum Unit DR2510 Approx 15,000 pages at 1 pages per job
	Standard Yield Toner ⁷ TN2510 - 1,200 pages		
Dimensions and Weights	With Carton (WxDxH) 580 x 517 x 434mm -13.90kg	Without Carton (WxDxH) 410 x 399 x 319mm - 11.4kg	
Duty Cycle	Recommended Monthly Up to 2,000 pages		
Operating Environment	Power Requirement 220-240V AC 50/60Hz	Operating Environment Humidity 20 - 80 % 10°C - 32.5°C 50°F - 90.5°F	Storage Environment Humidity 35 - 85 % 0°C - 40°C 32°F - 104°F
Environment	Approx Power Consumption ^{13,23} Copying: 490W Copying in quiet mode: 280W Printing: 470W Printing in quiet mode: 270W Ready: 43W Sleep: 4.1W Deep Sleep: 0.7W Power Off: 0.08W TEC Value 0.39 kWh/week	Sound Power ¹² Printing: 6.63B(A) Ready: Inaudible Quiet Mode: 6.12B(A) Deep Sleep: Inaudible Sound Pressure ¹² PC Printing (Mono): Approx. 49.0dB(A) Ready: 30.0db(A) Quiet Mode: 44.0db(A) Toner Save This reduces the toner consumption to get more pages from your consumables	Blue Angel Yes GS Mark Yes Nordic Swan Yes

- 3 Scan Speeds based on ISO/IEC 17991
- 7 Approx. declared yield value in accordance with ISO/IEC 19752
- 11 Capacity calculated with 80gsm paper
- 12 Sound pressure and sound power level in accordance with ISO 7779
- 13 Power consumption power off is measured according to IEC 62301 Edition 2.0
- 15 Windows and macOS only
- 16 Windows only
- 17 Optional download
- 18 Requires an Internet connection
- 23 Power consumption is measured using ENERGY STAR Ver 3.1 test method network configuration



Working with you for a better environment

At Brother, our green initiative is simple. We strive to take responsibility, act respectfully and try to make a positive difference to help build a society where sustainable development can be achieved. We call this approach Brother Earth.

www.brotherearth.com

All specifications correct at the time of printing and are subject to change.

Brother is a registered trademark of Brother Industries Ltd. Brand product names are registered trademarks or trademarks of their respective companies.

brother
at your side