


# LINDY PRODUCT SPECIFICATION (1 OF 2)

| Length | Polybag Size | Label Type | Product Number |
|--------|--------------|------------|----------------|
| 0.2m   | FP1          | LAS        | 36720          |
| 0.5m   | FP1          | LAS        | 36721          |
| 1m     | FP2          | LAS        | 36722          |
| 2m     | FP2          | LAS        | 36723          |
| 3m     | FP2          | LAS        | 36724          |
| 5m     | FP2          | LAS        | 36725          |


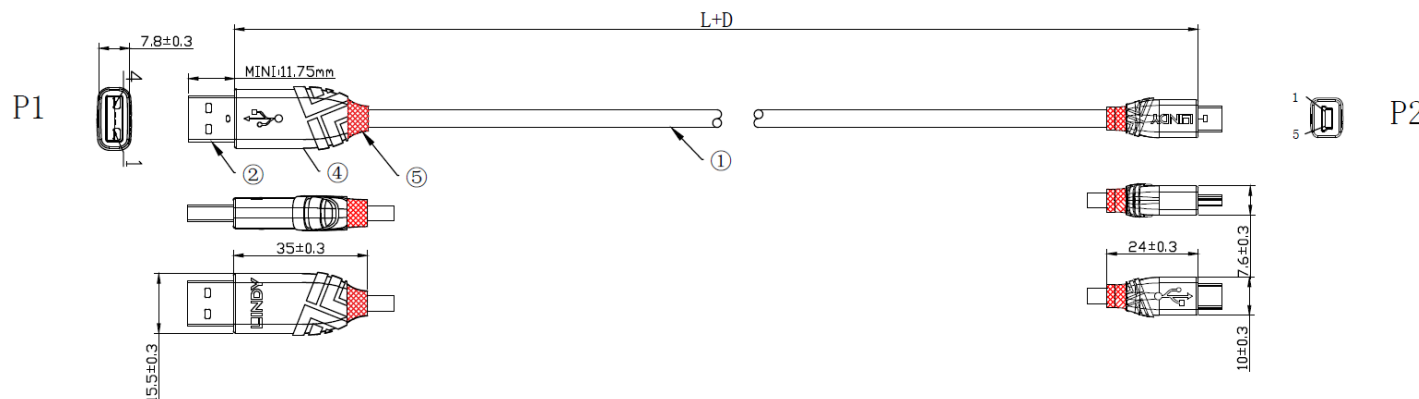


CABLE PRINTING: LINDY Anthra Line USB 2.0 Cable lindy.com E330337  
AWM Style 2725 80°C 30V VW-1

## 2. ELECTRICAL

- 2.1 100% OPEN AND SHORT TEST
- 2.2 HI-POT:DC300V/0.01S
- 2.3 INSULATION RESISTANCE:5MΩ<sub>min</sub>
- 2.4 CONDUCTOR RESISTANCE:2ohm

A B Function

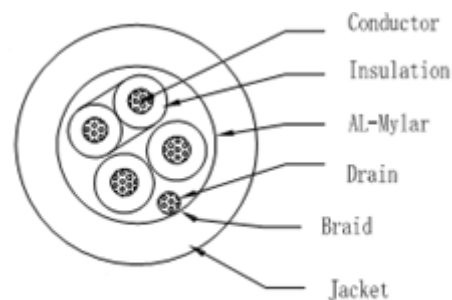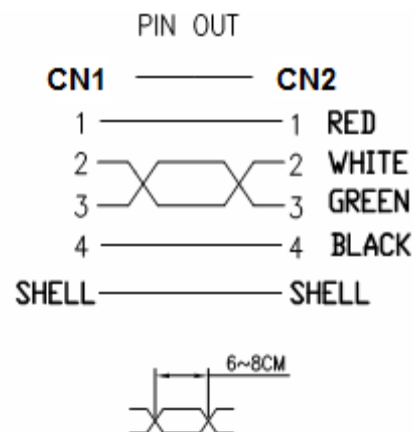

### Product Name: USB 2.0 Type A to Mini-B Cable, Anthra Line

- Connector P1: USB 2.0 Type A Male, gold flash contacts, nickel plated shell
- Connector P2: USB 2.0 Type Mini-B Male, gold flash contacts, nickel plated shell
- Cable: 28AWG(7/0.127±0.008TC)\*1P+28AWG(7/0.127±0.08TC)\*2C+AL/MY+D(7/0.1BC)+ B(16/4/0.12ALM), Black PVC Jacket OD: 3.8mm
- Cable Colour: black
- Connector: PVC Cool Grey 11C
- Grommet: PVC red (Pantone No. 2035C)

### Product Compliance:

CE, UKCA, RoHS, REACH (Art. 33, Anx 17), POP, CP65, UL (raw cable)

| Alterations                                                                                                         | Issue | Date     | BY | GB | DE |
|---------------------------------------------------------------------------------------------------------------------|-------|----------|----|----|----|
| Updated drawing, electrical test information, Compliance, cable printing (removed RoHS, added VW-1) and Pantone No. | 3     | 06.08.21 | JA |    | JA |
|                                                                                                                     |       |          |    |    |    |
|                                                                                                                     |       |          |    |    |    |

Drawn By: ML, 19.01.2018

All connectors viewed from front

Tolerances:  
Overall Length 0% +10%  
Conductor +/- 0.01mm per core


© Lindy group. All rights reserved. lindy.com

**LINDY**  
CONNECTION PERFECTION


# LINDY PRODUCT SPECIFICATION (2 OF 2)

Product  
Number

**Additional Imagery**  
USB Type A:

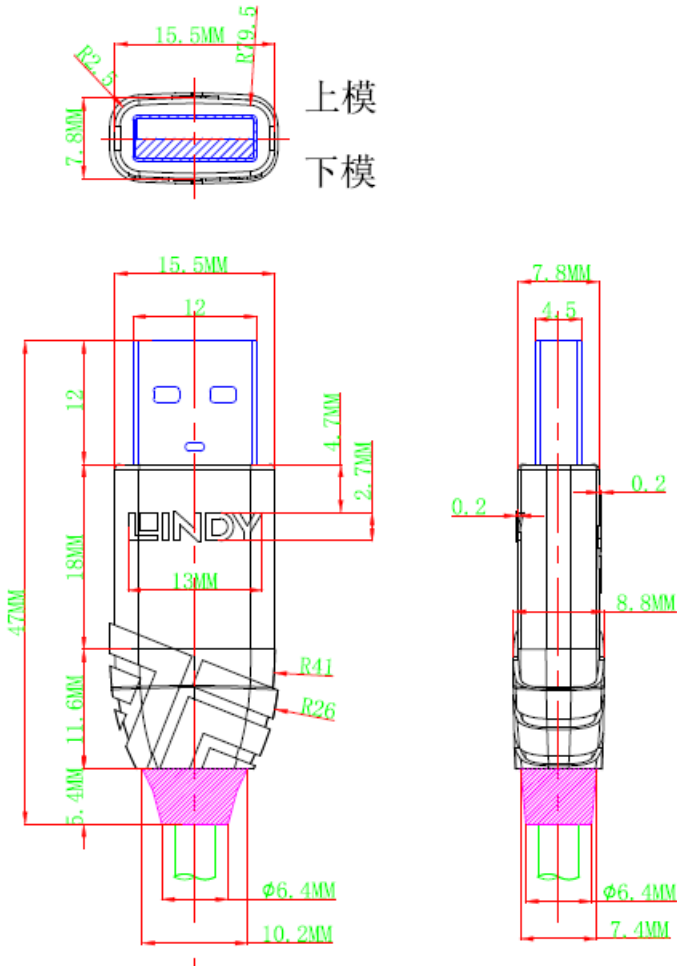

**Additional Description**  
USB Type Mini-B:

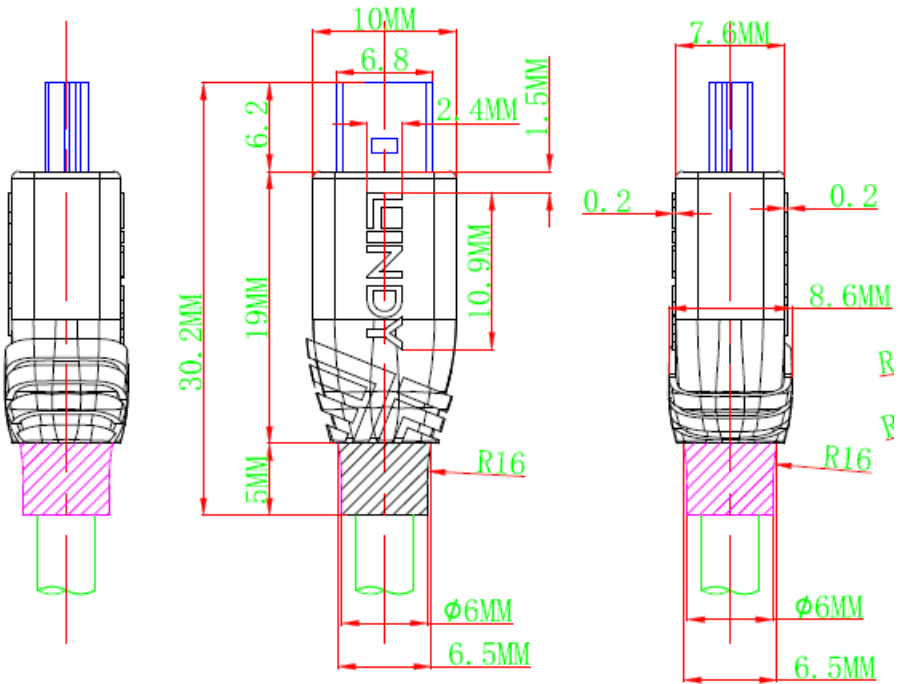

- 36720
- 36721
- 36722
- 36723
- 36724
- 36725