

greenly

2025-09-17

Lyreco LCA

Life Cycle Assessment

The methodology in this report is based on ISO 14040

3458912 (sold in CH)

Summary



01 | Methodology



02 | Results

01

Methodology

Environmental Impact Assessment

Functional unit	<p>The functional unit is a quantified performance of a product system for use as a reference unit. One of the primary purposes of a functional unit is to provide a reference to which the input and output data are normalized (in a mathematical sense). The functional unit of this analysis is "500 page(s) of A4 paper for writing".</p>
Impact Indicator	<p>The impact is measured through the "IPCC 2013 GWP 100a" method.</p>
Electricity impact calculation method	<p>Following guidelines from the GHG Protocol, the impact of electricity is calculated using the location-based approach. This means that the emission factors used represent the average annual carbon intensity of the power grid in the country the processes take place in.</p>
Hypothesis	

Environmental Impact Assessment

System Boundaries

The scope of this research includes the complete lifecycle of a piece of paper from raw material extraction to disposal options for each material, which is the cradle-to-grave perspective.

Exclusions


The impact of secondary packaging impact and writing utensils are excluded from this assessment.

02

Results

3458912 (sold in CH)


Climate Change

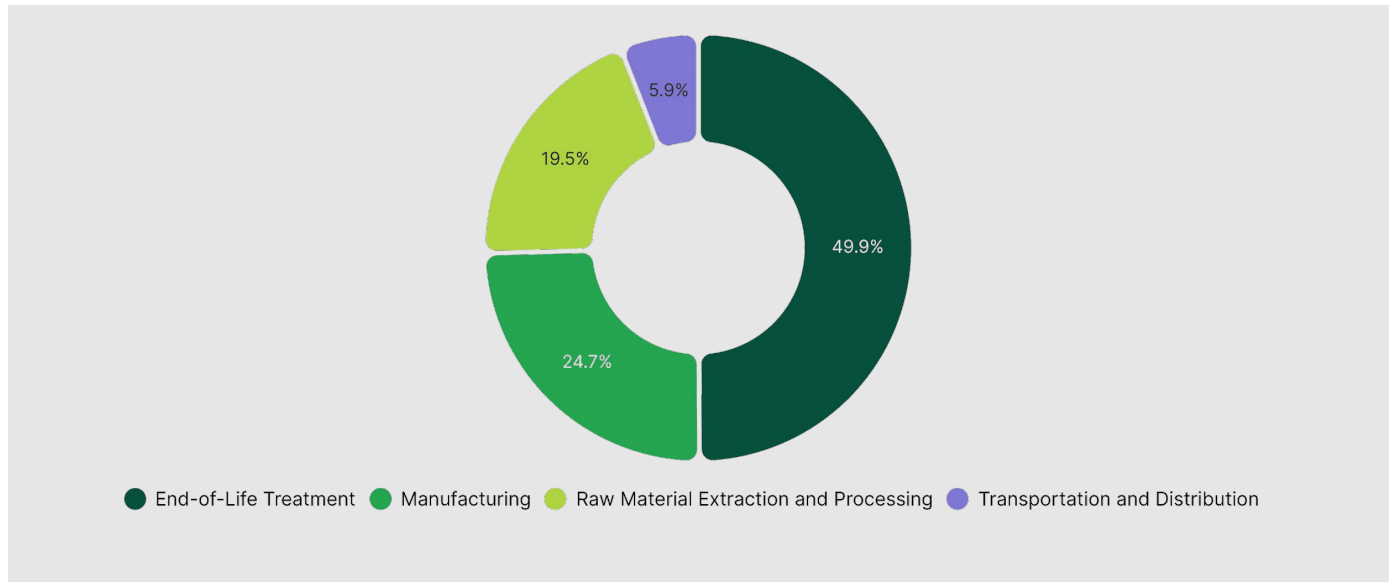

Step	Impact (kg CO ₂ eq)	Percentage (%)
End-of-Life Treatment	2.87	49.92 %
Manufacturing	1.42	24.68 %
Raw Material Extraction and Processing	1.12	19.49 %
Transportation and Distribution	0.34	5.92 %
TOTAL	5.75	100.00 %

3458912 (sold in CH)


Climate Change - Raw Material Extraction and Processing

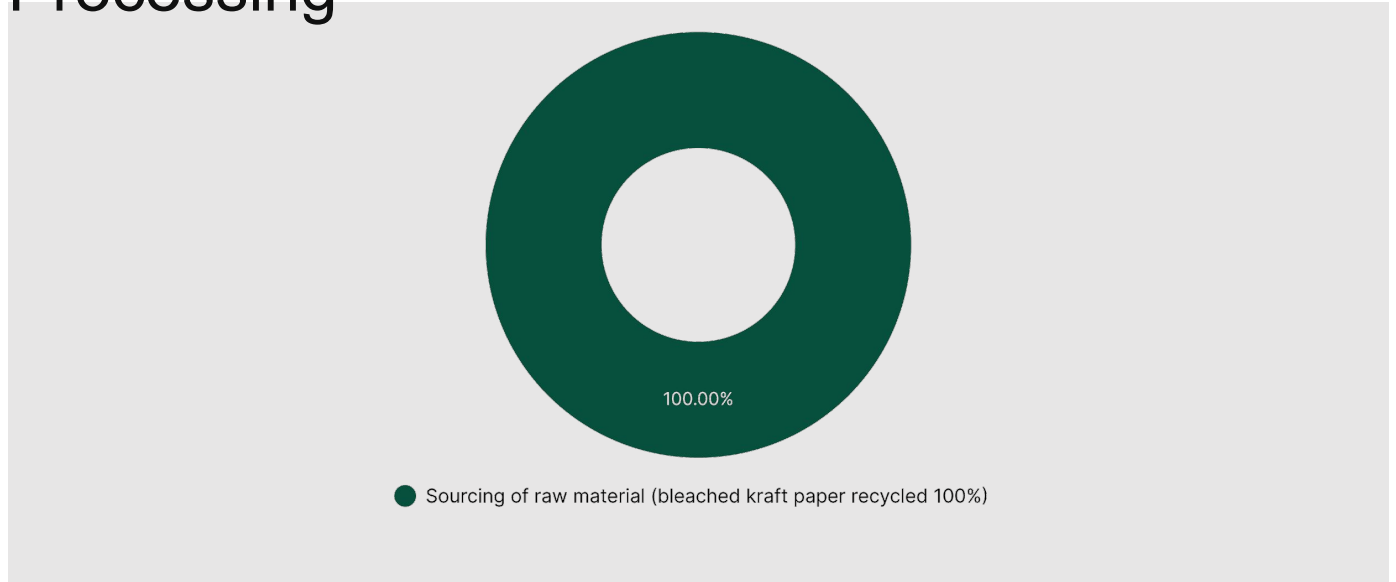

Activity	Emission Factor Num	Quantity	Impact (kg CO ₂ eq)	Percentage (%)
Sourcing of raw material (bleached kraft paper recycled 100%)	1	7.47	1.12	100.00 %
TOTAL			1.12	100.00 %

3458912 (sold in CH)

Climate Change - Manufacturing

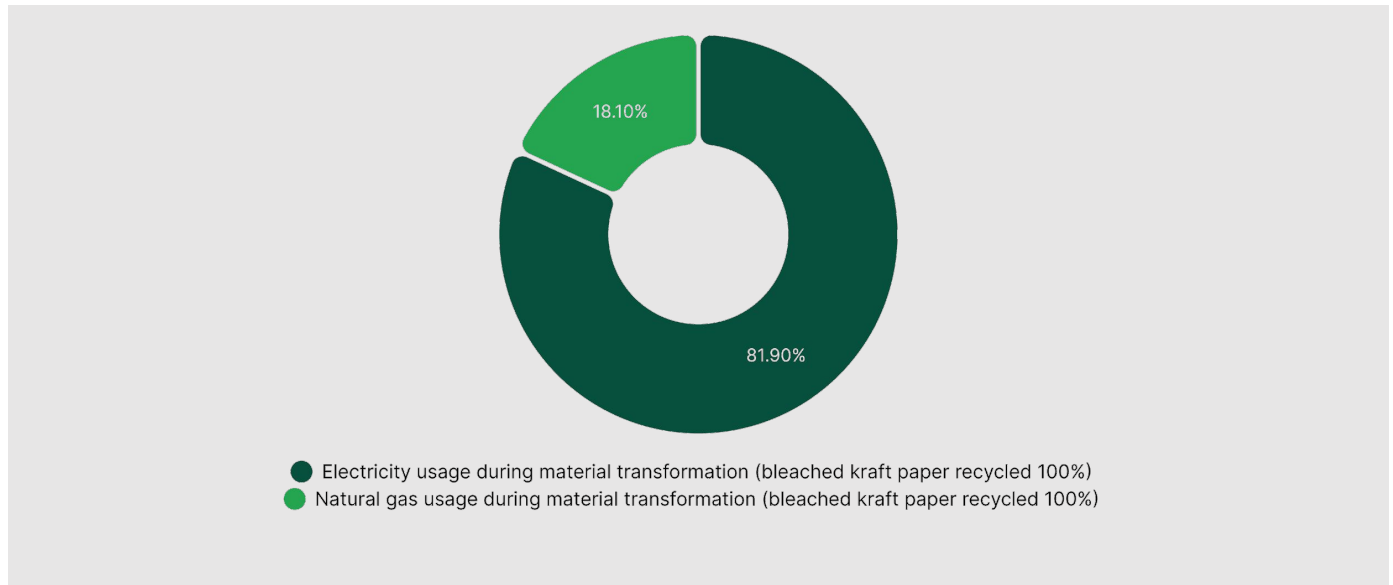

Activity	Emission Factor Num	Quantity	Impact (kg CO ₂ eq)	Percentage (%)
Electricity usage during material transformation (bleached kraft paper recycled 100%)	3	2.64	1.16	81.90 %
Natural gas usage during material transformation (bleached kraft paper recycled 100%)	2	1.42	0.26	18.10 %
TOTAL			1.42	100.00 %

3458912 (sold in CH)


Climate Change - Transportation and Distribution



Activity	Emission Factor Num	Quantity	Impact (g CO ₂ eq)	Percentage (%)
Freight	4	4.98	340.27	100.00 %
TOTAL			340.27	100.00 %

3458912 (sold in CH)

Climate Change - End-of-Life Treatment

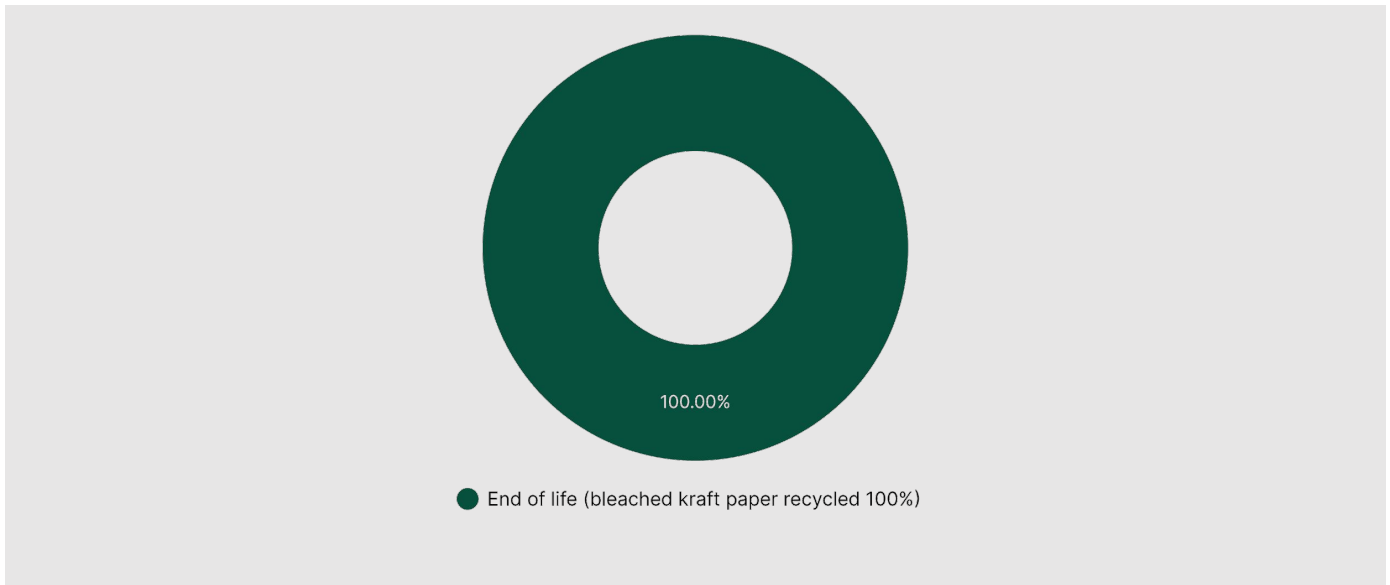

Activity	Emission Factor Num	Quantity	Impact (kg CO ₂ eq)	Percentage (%)
End of life (bleached kraft paper recycled 100%)	5	4.98	2.87	100.00 %
TOTAL			2.87	100.00 %

Contact us

Alexis Normand CEO

www.greenly.earth