

**greenly**

2025-09-17

Lyreco LCA

# Life Cycle Assessment

*The methodology in this report is based on ISO 14040*

16145097 (sold in CH)

# Summary



**01** | Methodology



**02** | Results

# 01

## Methodology

# Environmental Impact Assessment

<p><b>Functional unit</b></p>	<p>The functional unit is a quantified performance of a product system for use as a reference unit. One of the primary purposes of a functional unit is to provide a reference to which the input and output data are normalized (in a mathematical sense). The functional unit of this analysis is "12 set(s) of bound pages of paper for the purpose of writing".</p>
<p><b>Impact Indicator</b></p>	<p>The impact is measured through the "IPCC 2013 GWP 100a" method.</p>
<p><b>Electricity impact calculation method</b></p>	<p>Following guidelines from the GHG Protocol, the impact of electricity is calculated using the location-based approach. This means that the emission factors used represent the average annual carbon intensity of the power grid in the country the processes take place in.</p>
<p><b>Hypothesis</b></p>	

# Environmental Impact Assessment

## System Boundaries

The scope of this research includes the complete lifecycle of a notebook from raw material extraction to disposal options for each material, which is the cradle-to-grave perspective.

## Exclusions


The impact of secondary packaging and writing utensils are excluded from this assessment.

# 02

## Results

16145097 (sold in CH)

# Climate Change

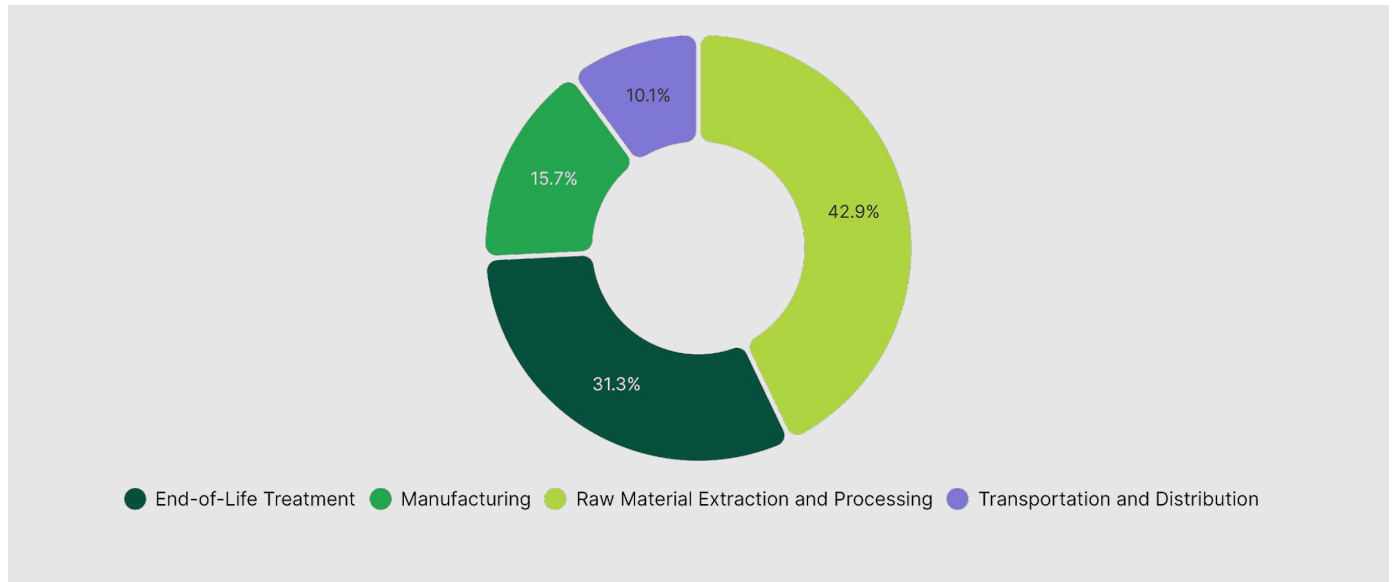

Step	Impact (kg CO <sub>2</sub> eq)	Percentage (%)
Raw Material Extraction and Processing	0.58	42.88 %
End-of-Life Treatment	0.42	31.35 %
Manufacturing	0.21	15.68 %
Transportation and Distribution	0.14	10.10 %
<b>TOTAL</b>	<b>1.35</b>	<b>100.00 %</b>

16145097 (sold in CH)

# Climate Change - Raw Material Extraction and Processing



● Sourcing of raw material (adhesive) ● Sourcing of raw material (bleached kraft paper)

Activity	Emission Factor Num	Quantity	Impact (g CO <sub>2</sub> eq)	Percentage (%)
Sourcing of raw material (bleached kraft paper)	1	1.07	534.08	92.50 %
Sourcing of raw material (adhesive)	2	$7.94 \cdot 10^{-3}$	43.31	7.50 %

--	--	--	--	--

--	--	--	--	--

TOTAL			577.38	100.00 %
-------	--	--	--------	----------

16145097 (sold in CH)

# Climate Change - Manufacturing



Activity	Emission Factor Num	Quantity	Impact (g CO <sub>2</sub> eq)	Percentage (%)
Electricity usage during material transformation (bleached kraft paper)	3	0.38	167.71	79.44 %
Natural gas usage during material transformation (bleached kraft paper)	4	0.2	36.9	17.48 %
Electricity usage during material transformation (adhesive)	3	0.01	6.52	3.09 %
TOTAL			211.13	100.00 %



16145097 (sold in CH)

# Climate Change - End-of-Life Treatment



Activity	Emission Factor Num	Quantity	Impact (g CO <sub>2</sub> eq)	Percentage (%)
End of life (bleached kraft paper)	7	0.72	412.31	97.68 %
End of life (adhesive)	6	7.22 · 10 <sup>-3</sup>	9.77	2.32 %
TOTAL			422.09	100.00 %

# Contact us

Alexis Normand CEO

[www.greenly.earth](http://www.greenly.earth)