

greenly

2025-09-17

Lyreco LCA

Life Cycle Assessment

The methodology in this report is based on ISO 14040

20801515 (sold in FR)

Summary



01 | Methodology



02 | Results

01

Methodology

Environmental Impact Assessment

<p>Functional unit</p>	<p>The functional unit is a quantified performance of a product system for use as a reference unit. One of the primary purposes of a functional unit is to provide a reference to which the input and output data are normalized (in a mathematical sense). The functional unit of this analysis is "1 set(s) of bound pages of paper for the purpose of writing".</p>
<p>Impact Indicator</p>	<p>The impact is measured through the "IPCC 2013 GWP 100a" method.</p>
<p>Electricity impact calculation method</p>	<p>Following guidelines from the GHG Protocol, the impact of electricity is calculated using the location-based approach. This means that the emission factors used represent the average annual carbon intensity of the power grid in the country the processes take place in.</p>
<p>Hypothesis</p>	

Environmental Impact Assessment

System Boundaries

The scope of this research includes the complete lifecycle of a notebook from raw material extraction to disposal options for each material, which is the cradle-to-grave perspective.

Exclusions


The impact of secondary packaging and writing utensils are excluded from this assessment.

02

Results

20801515 (sold in FR)


Climate Change

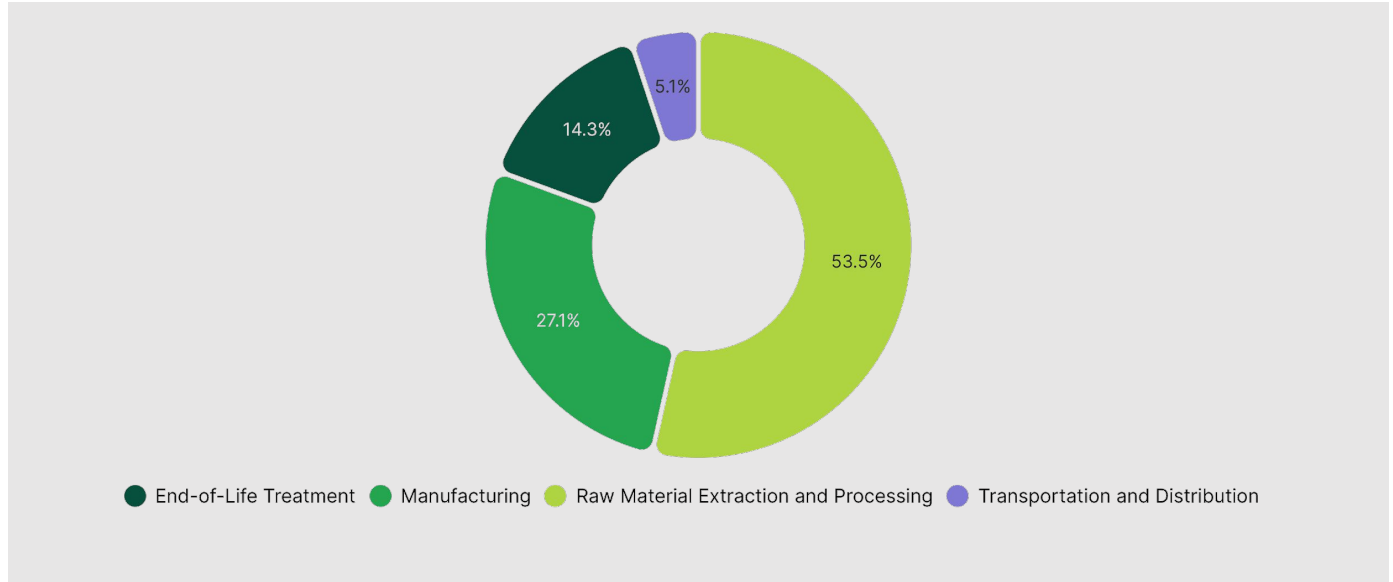

Step	Impact (kg CO ₂ eq)	Percentage (%)
Raw Material Extraction and Processing	0.93	53.48 %
Manufacturing	0.47	27.14 %
End-of-Life Treatment	0.25	14.28 %
Transportation and Distribution	0.09	5.10 %
TOTAL	1.73	100.00 %

20801515 (sold in FR)

Climate Change - Raw Material Extraction and Processing

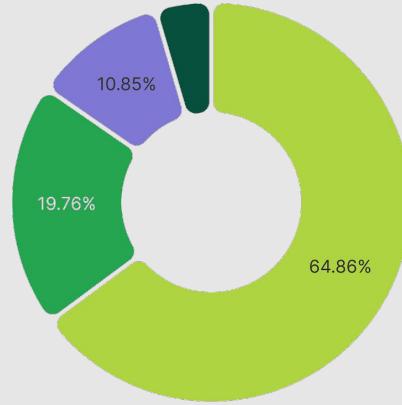


- Sourcing of raw material (adhesive)
- Sourcing of raw material (bleached kraft paper)
- Sourcing of raw material (polyurethane fiber)
- Sourcing of raw material (synthetic rubber)

Activity	Emission Factor Num	Quantity	Impact (g CO ₂ eq)	Percentage (%)
Sourcing of raw material (polyurethane fiber)	4	0.09	600.6	64.86 %
Sourcing of raw material (bleached kraft paper)	3	0.37	182.94	19.76 %
Sourcing of raw material (synthetic rubber)	2	0.04	100.47	10.85 %
Sourcing of raw material (adhesive)	1	7.7 · 10 ⁻³	41.96	4.53 %
TOTAL			925.96	100.00 %

20801515 (sold in FR)


Climate Change - Manufacturing

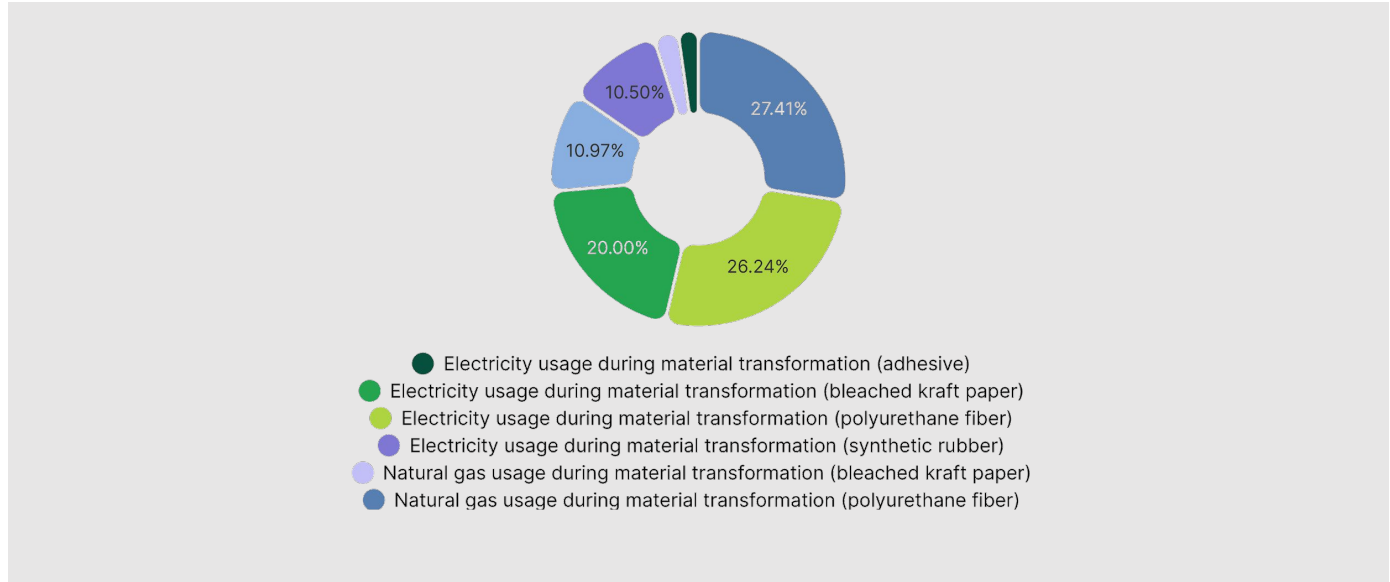

Activity	Emission Factor Num	Quantity	Impact (g CO ₂ eq)	Percentage (%)
Natural gas usage during material transformation (polyurethane fiber)	6	0.71	128.85	27.41 %
Electricity usage during material transformation (polyurethane fiber)	5	0.17	123.33	26.24 %
Electricity usage during material transformation (bleached kraft paper)	5	0.13	94	20.00 %
Natural gas usage during material transformation (synthetic rubber)	6	0.28	51.54	10.97 %
Electricity usage during material transformation (synthetic rubber)	5	0.07	49.33	10.50 %
Natural gas usage during material transformation (bleached kraft paper)	6	0.07	12.64	2.69 %
Electricity usage during material transformation (adhesive)	5	0.01	10.33	2.20 %
TOTAL			470.02	100.00 %

20801515 (sold in FR)

Climate Change - End-of-Life Treatment

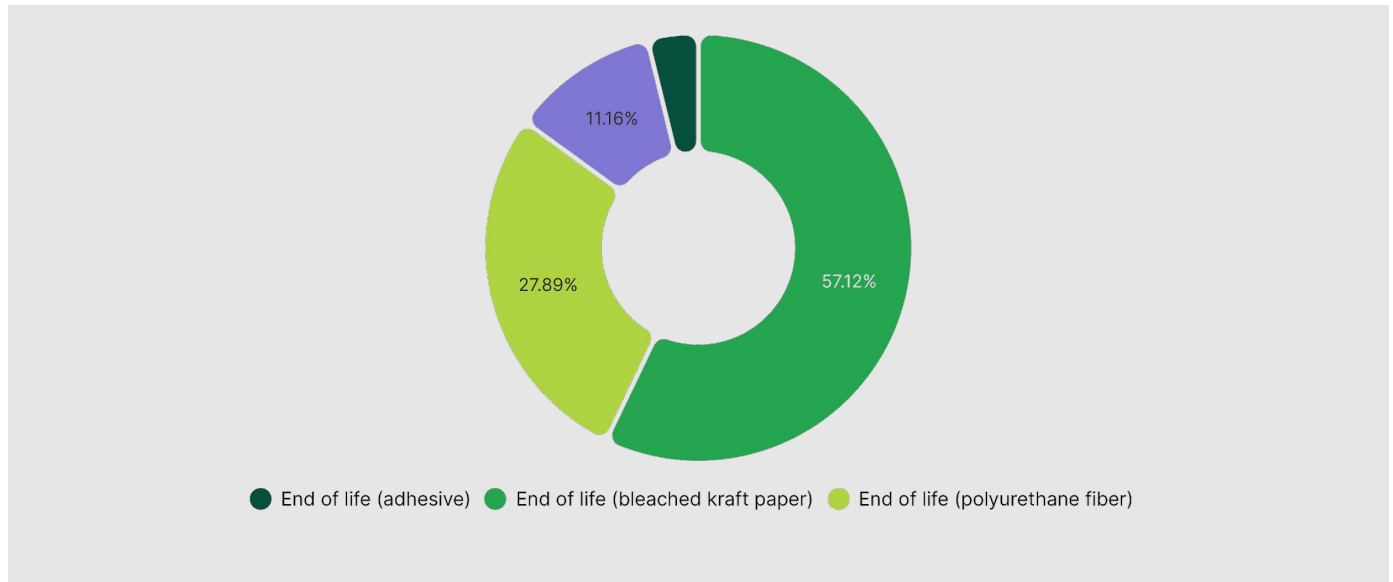

Activity	Emission Factor Num	Quantity	Impact (g CO ₂ eq)	Percentage (%)
End of life (bleached kraft paper)	9	0.25	141.23	57.12 %
End of life (polyurethane fiber)	8	0.07	68.96	27.89 %
End of life (synthetic rubber)	8	0.03	27.58	11.16 %
End of life (adhesive)	10	6.99 · 10 ⁻³	9.47	3.83 %
TOTAL			247.24	100.00 %

Contact us

Alexis Normand CEO

www.greenly.earth